


# Impulse Response for Rational System Functions

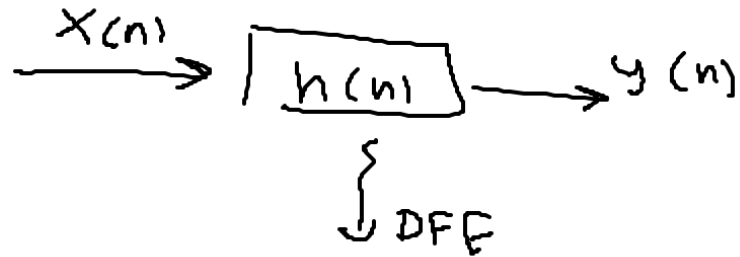

$$H(z) = \frac{\sum_{k=0}^M b_k z^{-k}}{\sum_{k=0}^N a_k z^{-k}}$$

$$H(z) = \sum_{r=0}^{M-N} B_r z^{-r} + \sum_{k=1}^N \frac{A_k}{1 - d_k z^{-1}}$$

$$H(z) = \sum_{r=0}^{M-N} B_r z^{-r} \equiv \text{FIR}$$




$$H(z) = \sum_{k=1}^N \frac{A_k}{1 - d_k z^{-1}} \equiv \text{IIR}$$

$$\sum_{k=1}^N \frac{A_k}{1 - d_k z^{-1}}$$

$$\Rightarrow h(n) = \sum_{r=0}^{M-N} B_r \delta(n-r) + \sum_{k=1}^N A_k (d_k)^n u[n]$$



⇒ All-Pass System

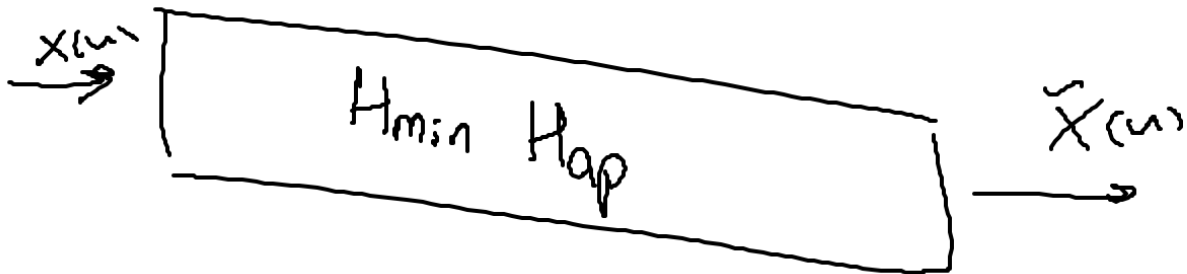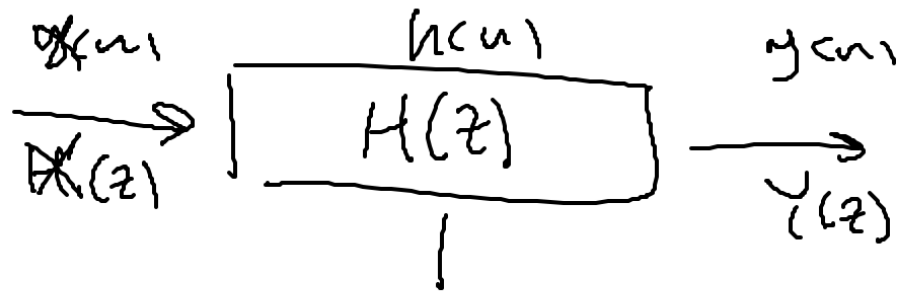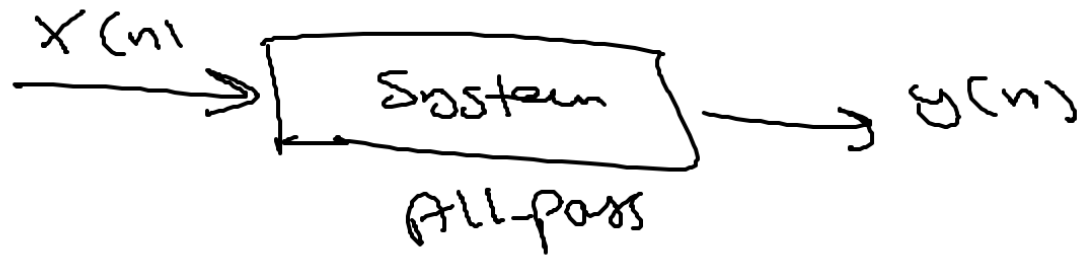

$$H_{ap}(z) = \frac{\bar{z}' - c^*}{1 - c \bar{z}'}$$

$$|H_{ap}(z)| = 1 \Rightarrow |H(e^{j\omega})| = 1$$

$$\text{EX: } H(z) = \overset{>1}{\left(1 - \frac{1}{0.9} \bar{z}'\right)} \overset{>1}{\left(1 + \frac{1}{0.9} \bar{z}'\right)} \overset{<1}{\left(1 - j0.7 \bar{z}'\right)} \overset{<1}{\left(1 + j0.7 \bar{z}'\right)}$$

Decompose  $H(z)$  into min-phase and All-pass

Ans.

$$H(z) = \left(1 - \frac{1}{0.9} \bar{z}^{-1}\right) \left(1 + \frac{1}{0.9} \bar{z}^{-1}\right) (1 - j0.7 \bar{z}^{-1}) (1 + j0.7 \bar{z}^{-1})$$


$$= \left(\frac{-1}{0.9}\right) (\bar{z}^{-1} - 0.9) \left(\frac{1}{0.9}\right) (\bar{z}^{-1} + 0.9) (1 - j0.7 \bar{z}^{-1}) (1 + j0.7 \bar{z}^{-1})$$

$$= \left(\frac{-1}{0.81}\right) (\bar{z}^{-1} - 0.9) \cdot \frac{(1 - 0.9^* \bar{z}^{-1})}{(1 - 0.9^* \bar{z}^{-1})} \cdot \frac{(\bar{z}^{-1} + 0.9) \cdot (1 + 0.9 \bar{z}^{-1})}{1 + 0.9 \bar{z}^{-1}} (1 - j0.7 \bar{z}^{-1}) (1 + j0.7 \bar{z}^{-1})$$

$$H(z) = \left( \frac{-1}{0.81} \right) \left( \frac{(\bar{z}^{-1} - 0.9)}{1 - 0.9\bar{z}^{-1}} \right) \left( \frac{\bar{z}^{-1} + 0.9}{1 + 0.9\bar{z}^{-1}} \right) (1 - 0.9\bar{z}^{-1})(1 + 0.9\bar{z}^{-1})(1 - j0.7\bar{z}^{-1})(1 + j0.7\bar{z}^{-1})$$

$$\Rightarrow H_{ap}(z) = \left( \frac{\bar{z}^{-1} - 0.9}{1 - 0.9\bar{z}^{-1}} \right) \left( \frac{\bar{z}^{-1} + 0.9}{1 + 0.9\bar{z}^{-1}} \right)$$

$$H_{min} = \left( \frac{-1}{0.81} \right) (1 - 0.9\bar{z}^{-1})(1 + 0.9\bar{z}^{-1})(1 - j0.7\bar{z}^{-1})(1 + j0.7\bar{z}^{-1})$$

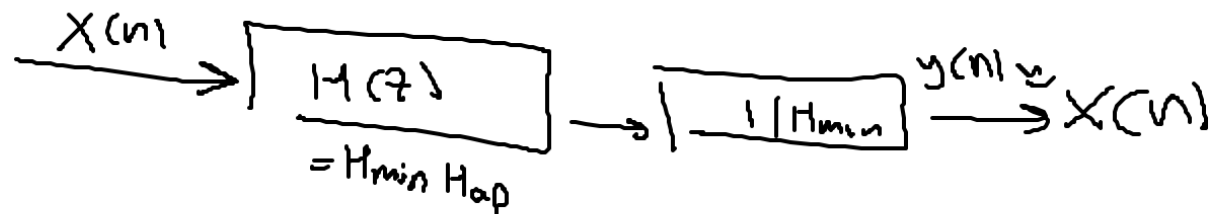

Example: Consider the sequence of  $H(z)$  is given by

$$H(z) = \frac{1 + 5z^{-1}}{1 + \frac{1}{2}z^{-1}}$$

Decompose  $H(z)$  into  $H_{min}$  and  $H_{ap}$

$$\begin{aligned} H(z) &= \frac{1 + 5z^{-1}}{1 + \frac{1}{2}z^{-1}} = 5 \frac{(z^{-1} + 1/5)}{1 + \frac{1}{2}z^{-1}} \cdot \frac{(1 + \frac{1}{5}z^{-1})}{1 + \frac{1}{5}z^{-1}} \\ &= \frac{5(1 + \frac{1}{2}z^{-1})}{1 + \frac{1}{2}z^{-1}} \cdot \underbrace{\frac{(z^{-1} + 1/5)}{1 + \frac{1}{5}z^{-1}}}_{H_{ap}(z)} \end{aligned}$$

$H_{min}(z)$                        $H_{ap}(z)$

Now, let

$$H(z) = \frac{1 + j5 z^{-1}}{1 + \frac{1}{2} z^{-1}} = j5 \left( z^{-1} + \frac{1}{j5} \right) \cdot \frac{1 + \left( \frac{1}{j5} \right)^* z^{-1}}{1 + \left( \frac{1}{j5} \right)^* z^{-1}}$$

$$= j5 \left( z^{-1} - j/5 \right) \cdot \frac{1 + \left( \frac{-j1}{5} \right)^* z^{-1}}{1 + \left( \frac{-j}{5} \right)^* z^{-1}}$$

$$= j5 \left( z^{-1} - j/5 \right) \cdot \frac{1 + (j/5) z^{-1}}{1 + (j/5) z^{-1}}$$




# Structures For Discrete time

$$y[n] = \sum_{k=0}^n x[k]$$

$$= x[n] + \underbrace{\sum_{k=0}^{n-1} x[k]}_{y[n-1]}$$

$$y[n] = x[n] + y[n-1]$$

$$y[n] - y[n-1] = x[n] \quad \checkmark \quad \checkmark \quad \Rightarrow \quad Y(z) - z^{-1}Y(z) = X(z)$$
$$[1 - z^{-1}]Y(z) = X(z) \Rightarrow H(z) = \frac{1}{1 - z^{-1}}$$

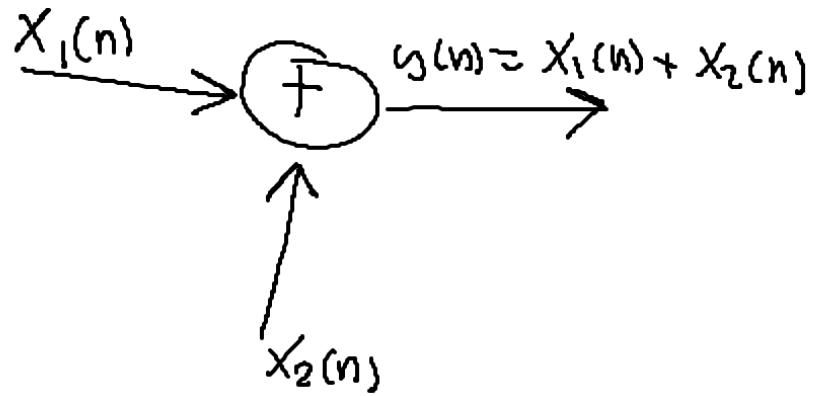

In general

$$Y(z) - \sum_{k=1}^N a_k z^{-k} Y(z) = \sum_{k=0}^M b_k z^{-k} X(z)$$

$$\left[1 - \sum_{k=1}^N a_k z^{-k}\right] Y(z) = \sum_{k=0}^M b_k z^{-k} X(z)$$

$$H(z) = \frac{Y(z)}{X(z)} = \frac{\sum_{k=0}^M b_k z^{-k}}{\left(1 - \sum_{k=1}^N a_k z^{-k}\right)}$$


$$H(z) = \frac{\sum_{k=0}^M b_k z^{-k}}{1 - \sum_{k=1}^N a_k z^{-k}}$$

$$\frac{Y(z)}{X(z)} = \frac{\sum_{k=0}^M b_k z^{-k}}{1 - \sum_{k=1}^N a_k z^{-k}} \Rightarrow Y(z) \left[ 1 - \sum_{k=1}^N a_k z^{-k} \right] = \sum_{k=0}^M b_k z^{-k} X(z)$$

$$Y(z) = \sum_{k=0}^M b_k z^{-k} X(z) + \sum_{k=1}^N a_k z^{-k} Y(z)$$

$$y(n) = \sum_{k=0}^M b_k x(n-k) + \sum_{k=1}^N a_k y(n-k)$$

# Direct form I

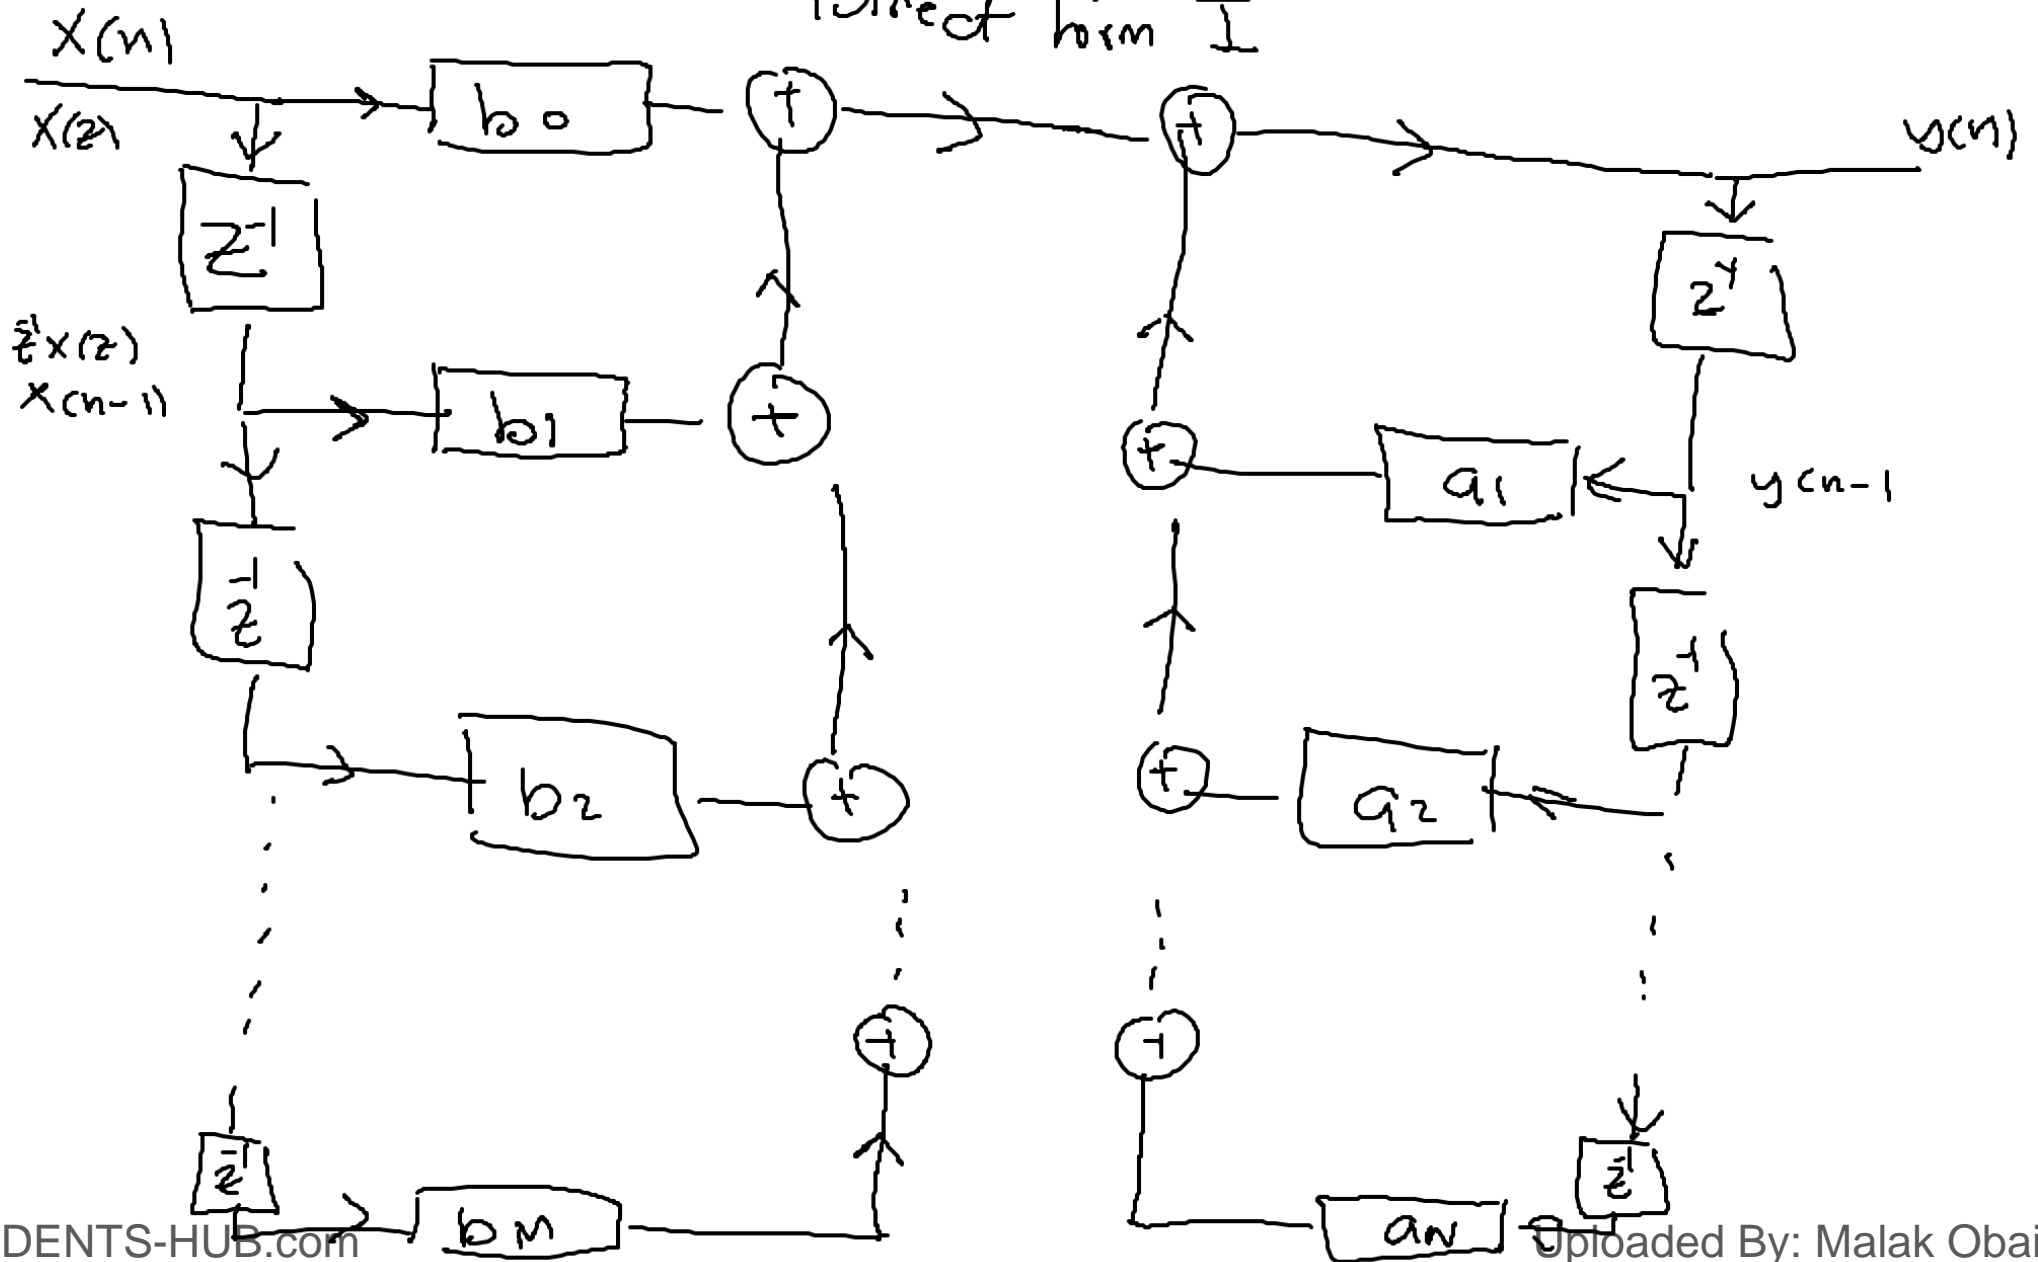

$$H(z) = \frac{\sum_{k=0}^M b_k z^{-k}}{1 - \sum_{k=1}^N a_k z^{-k}} = \left( \frac{1}{1 - \sum_{k=1}^N a_k z^{-k}} \right) \left( \sum_{k=0}^M b_k z^{-k} \right)$$

$$\Rightarrow H_1(z) = \frac{1}{1 - \sum_{k=1}^N a_k z^{-k}} \quad \frac{Y(z)}{X(z)} = H_1(z) H_2(z)$$

and  $H_2(z) = \sum_{k=0}^M b_k z^{-k}$

$$W(z) = H_1(z) X(z)$$

$$Y(z) = H_2(z) W(z)$$

$$\therefore \frac{Y(z)}{X(z)} = H_1(z) H_2(z) \Rightarrow Y(z) = H_1(z) X(z) H_2(z) = W(z) H_2(z)$$

Since

$$H_1(z) = \frac{1}{1 - \sum_{k=1}^N a_k z^{-k}}$$

$$W(z) = \frac{1}{1 - \sum_{k=1}^N a_k z^{-k}} X(z)$$

$$X(z) = \left[ 1 - \sum_{k=1}^N a_k z^{-k} \right] W(z)$$

$$W(z) = X(z) + \sum_{k=1}^N a_k z^{-k} W(z) \Rightarrow W(n) = X(n) + \sum_{k=1}^N a_k W(n-k)$$


→ (1)

$$\begin{aligned}
 Y(z) &= H_2(z) W(z) \\
 &= \sum_{k=0}^M b_k \bar{z}^k W(z)
 \end{aligned}$$


$$y(n) = \sum_{k=0}^M b_k w(n-k)$$

$$w(n) = X(n) + \sum_{k=1}^N a_k w(n-k)$$

$$y(n) = \sum_{k=0}^M b_k w(n-k)$$

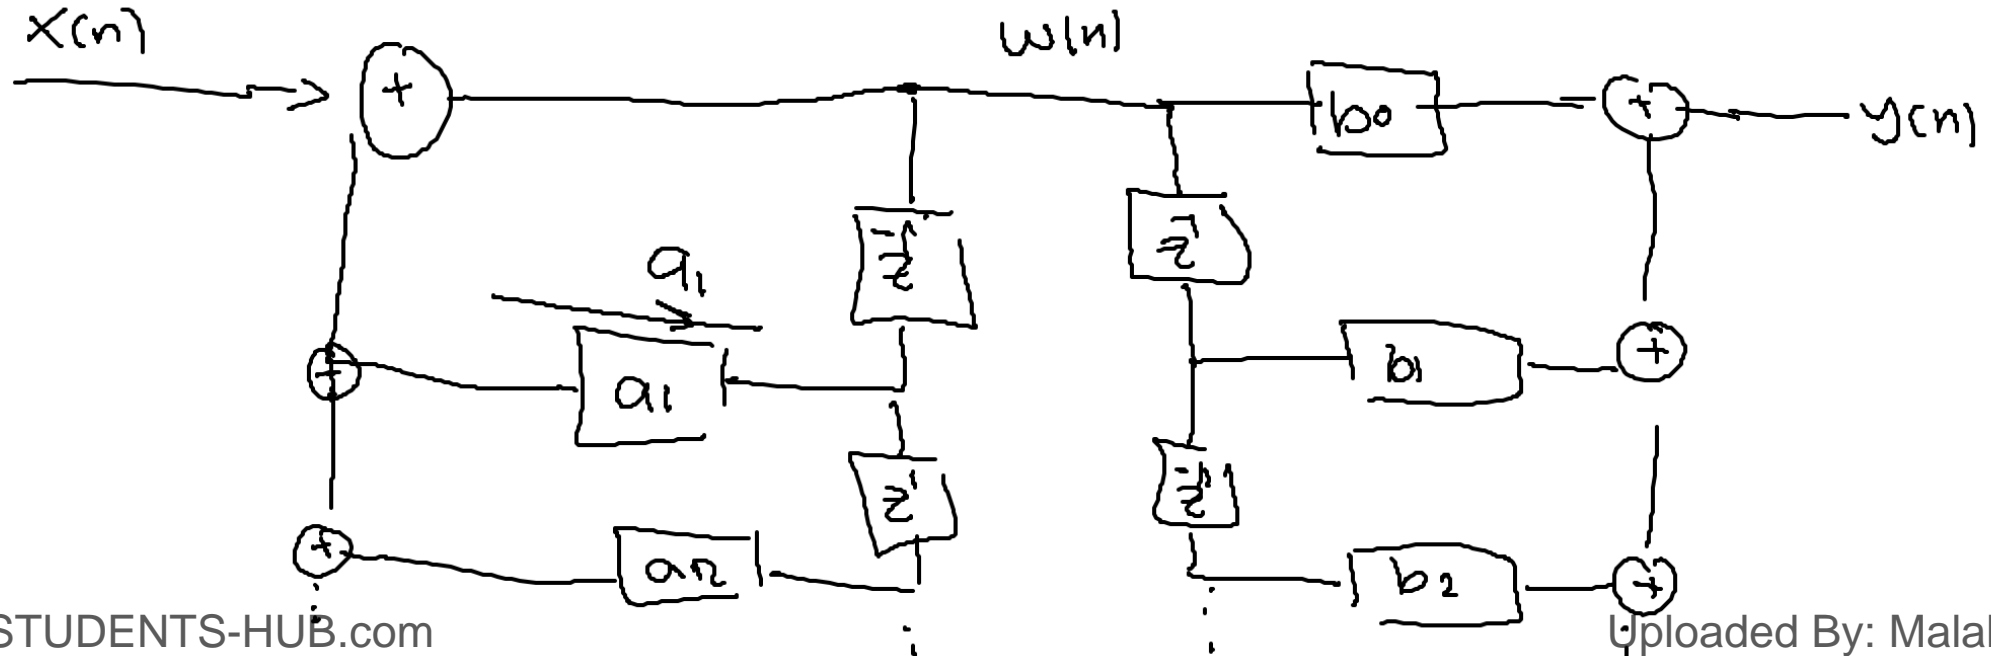



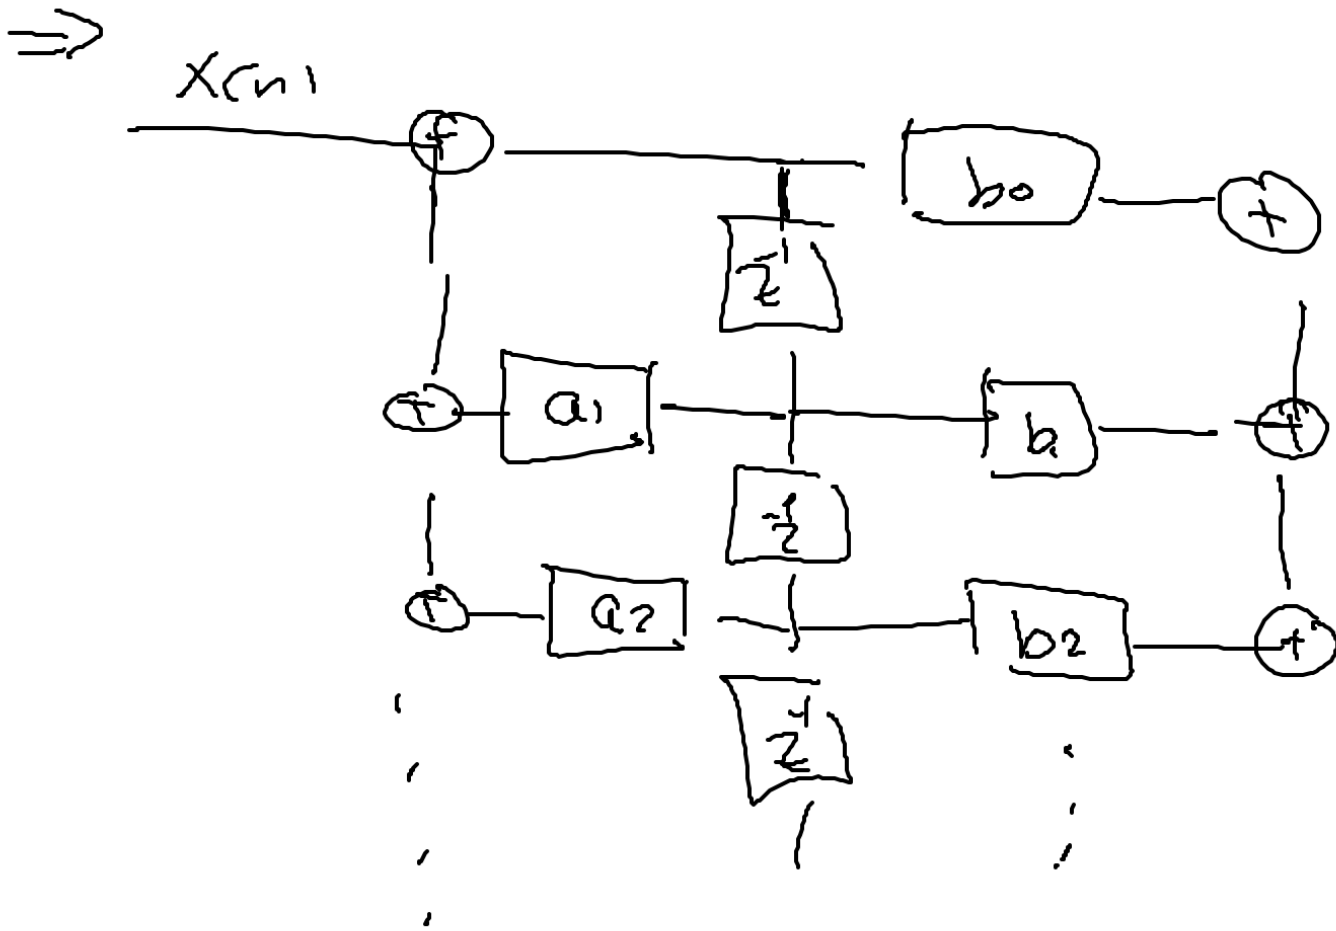

Direct Form II

Canonical Form

Example: Consider the following transfer function of the system

$$H(z) = \frac{1 + 0z^{-1}}{1 - 1.5z^{-1} + 0.9z^{-2}}$$

Draw

① Direct Form I

② Direct Form II

Ans:

To draw direct form I

$$- H(z) = \frac{1 + 2z^{-1}}{1 - 1.5z^{-1} + 0.9z^{-2}}$$

$$- \frac{Y(z)}{X(z)} = \frac{1 + 2z^{-1}}{1 - 1.5z^{-1} + 0.9z^{-2}}$$

$$- Y(z) [1 - 1.5z^{-1} + 0.9z^{-2}] = [1 + 2z^{-1}] X(z)$$

$$- Y(z) = [1 + 2z^{-1}] X(z) + [1.5z^{-1} - 0.9z^{-2}] Y(z)$$

$$y(n) = x(n) + 2x(n-1] + 1.5y(n-1) - 0.9y(n-2)$$

