

Reinforced Concrete Design I




ENCE 335

Column Design

Dr. Khalil M. Qatu

Columns

- ◆ Columns are defined as members that carry load mainly in compression
- ◆ Columns may carry bending moments about one or two axes of the cross-section
- ◆ In some cases, tensile forces may develop in columns

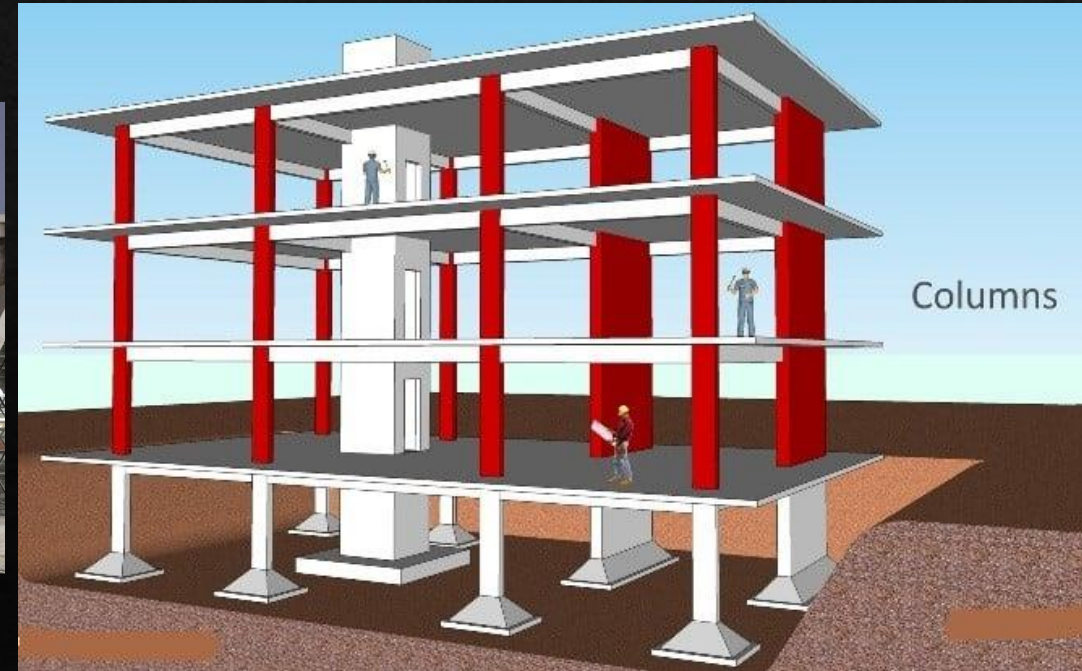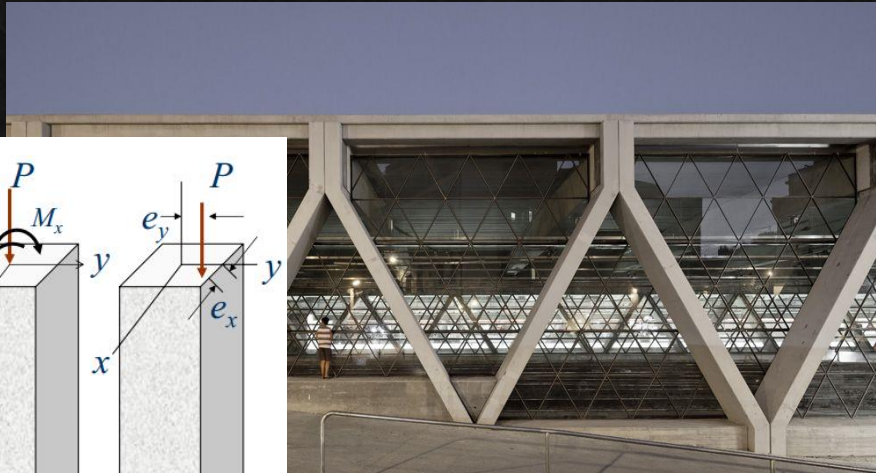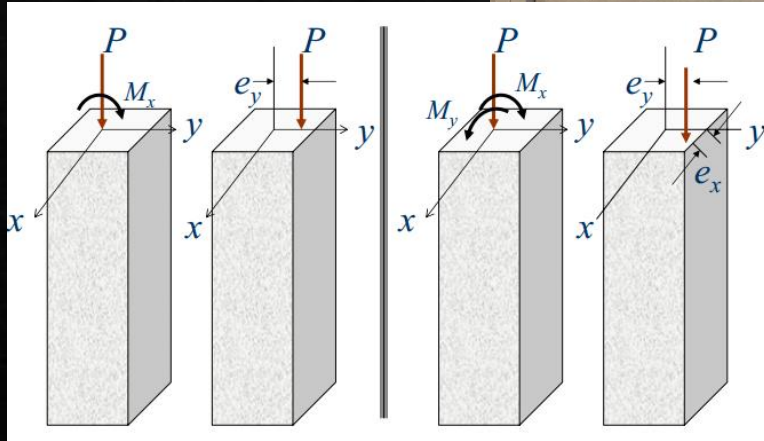

Behavior of Columns

◆ Types of columns

◆ Short columns

lateral dimensions are very large compared to its length (or height). Generally fail due to compression (crushing of concrete)

◆ Long (slender) columns





lateral dimensions are small compared to its length. Generally fails by buckling



Columns



◆ Types of RC columns

- ◆ Concrete reinforced with longitudinal bars and lateral ties
- ◆ Concrete reinforced with longitudinal bars and continuous spiral
- ◆ Composite concrete members with structural steel shapes, such as; I-sections, tubes, or pipes. With or without longitudinal bars and lateral ties

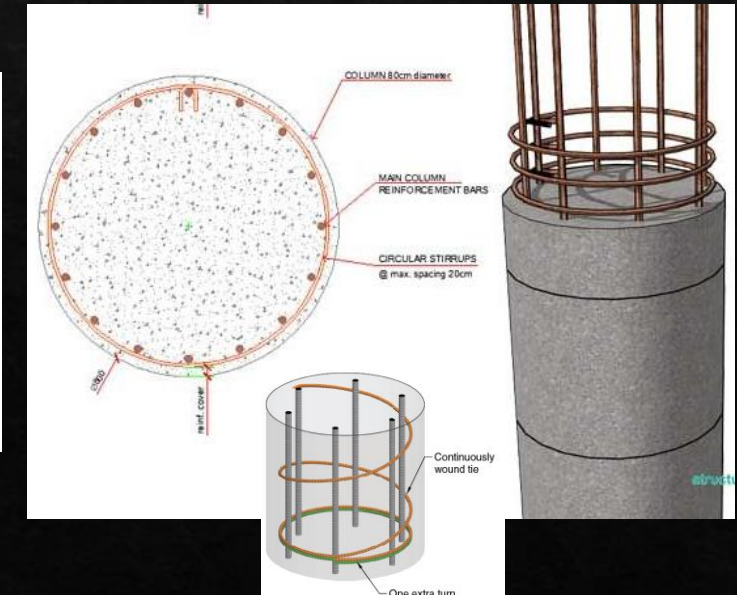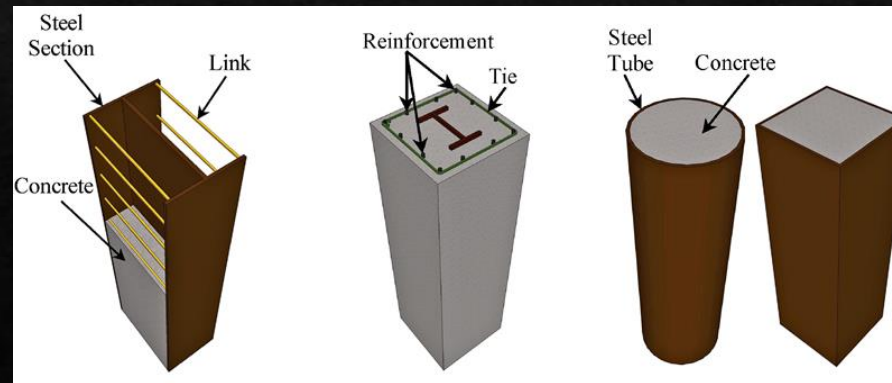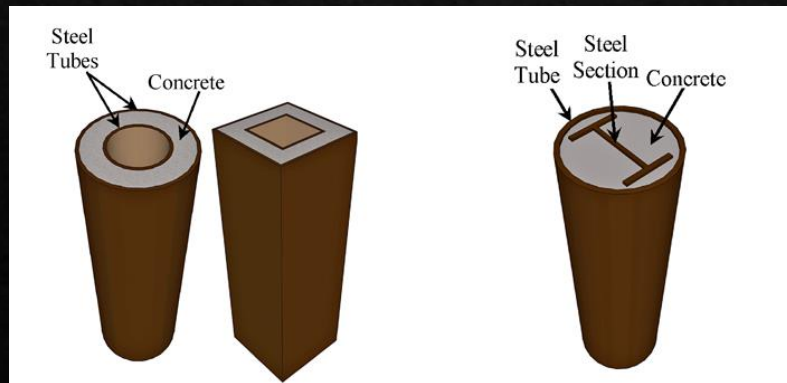
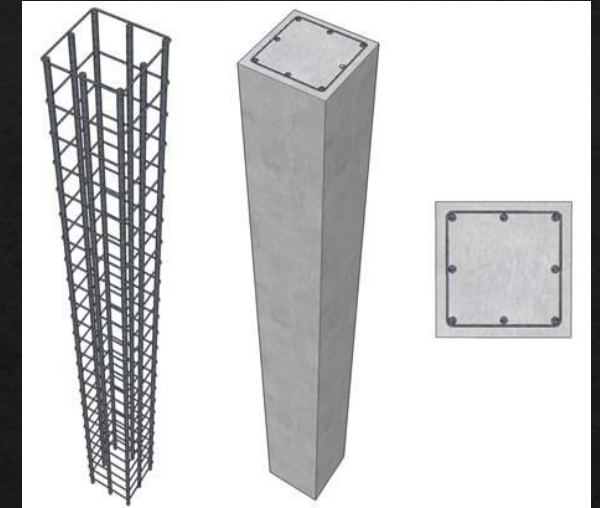


Load Calculation

- ◇ Reaction of beam supports
- ◇ Frame analysis
- ◇ Tributary area

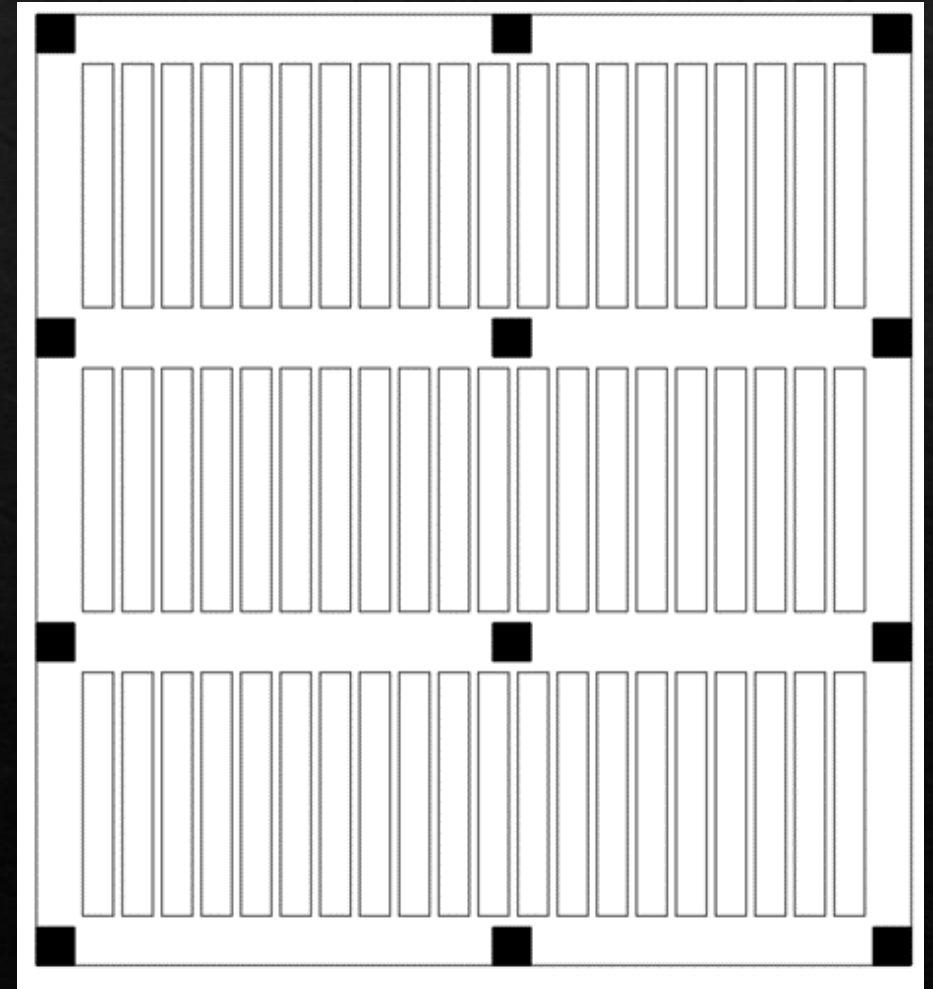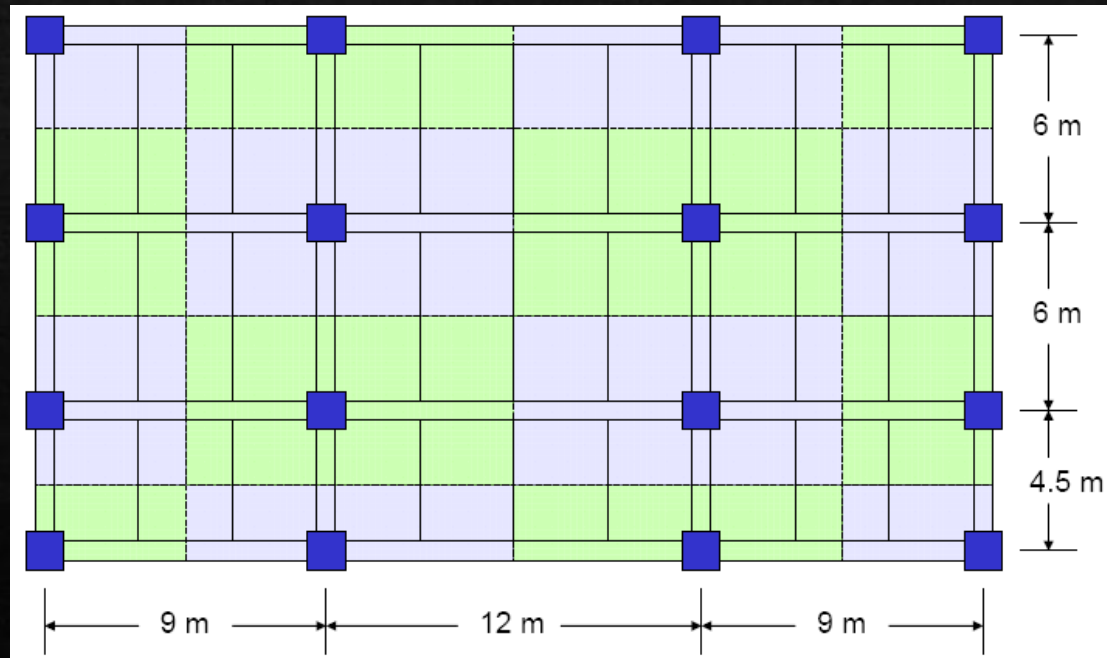

Concentric Short RC Columns

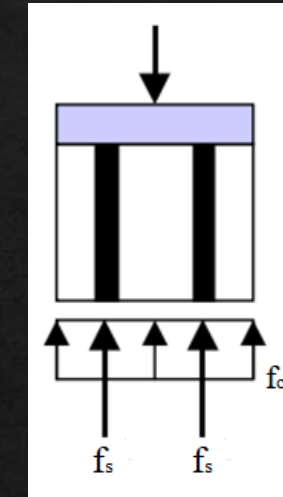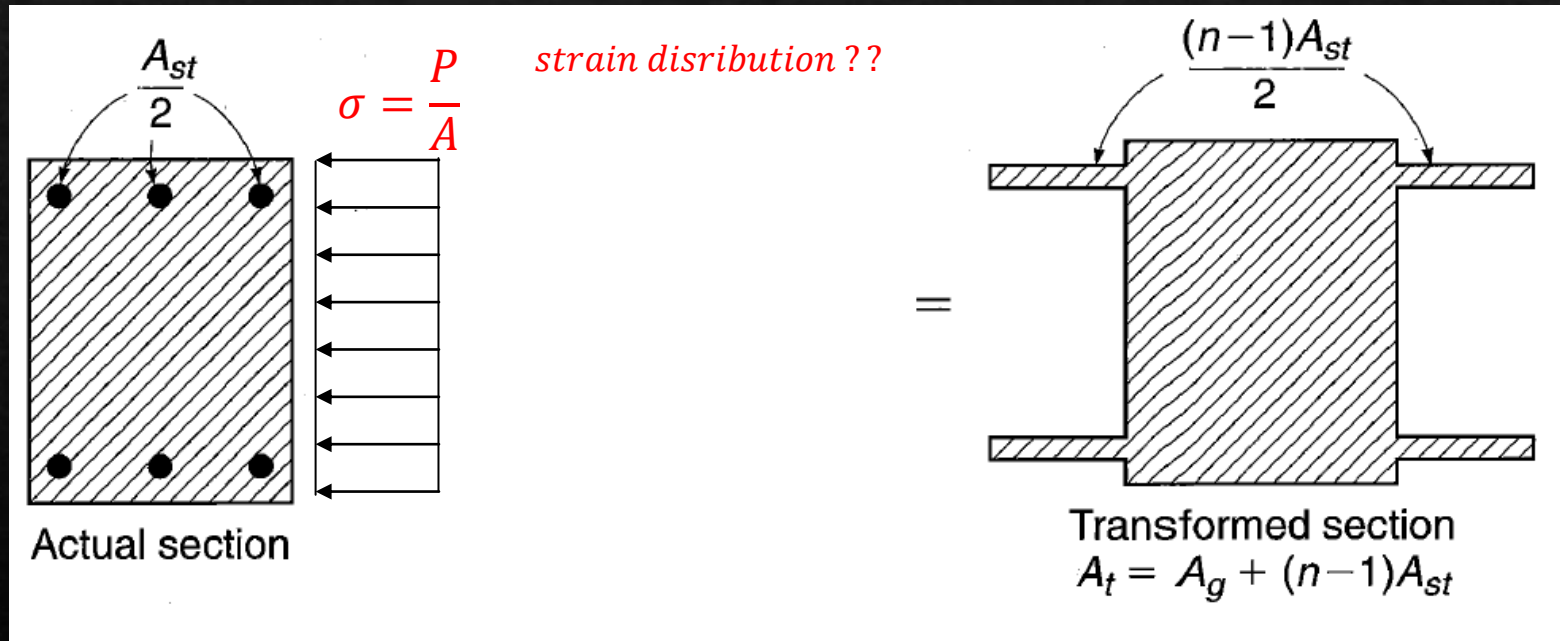

$$P = f_c (A_g + (n-1)A_s)$$

Where: f_c is stress in *concrete*
 $f_s =$

$$P_n = 0.85f'_c (A_g - A_s) + f_y A_s$$

$$\phi P_n \geq P_u$$

ACI requirements for Columns

- ◇ Strength reduction Factor: Spiral: $\phi = 0.75$, Tied: $\phi = 0.65$
- ◇ Steel reinforcement ratio $0.01 < \rho = \frac{A_s}{A_g} < 0.08$, generally $\rho \leq 0.04$
- ◇ Min number of bars:
 - ◇ Rectangular: 4 bars
 - ◇ Circular: 6 bars
- ◇ Min clear spacing $S_{min} = \max \begin{cases} 1.5 d_b \\ 40 \text{ mm} \end{cases}$
- ◇ Max spacing between bars unsupported with ties $S_{max} = 150 \text{ mm}$
- ◇ Clear cover : External 50 mm. internal 40 mm
- ◇ Accidental eccentricity :

To account for accidental eccentricity, the design axial strength of a section in pure compression is limited to 80 to 85 percent of the nominal axial strength

$$\phi P_n = r \phi [0.85 f'_c (A_g - A_{st}) + f_y A_{st}]$$

r = Reduction factor to account for accidental eccentricity

$r = 0.80$ (tied)

$r = 0.85$ (spiral)

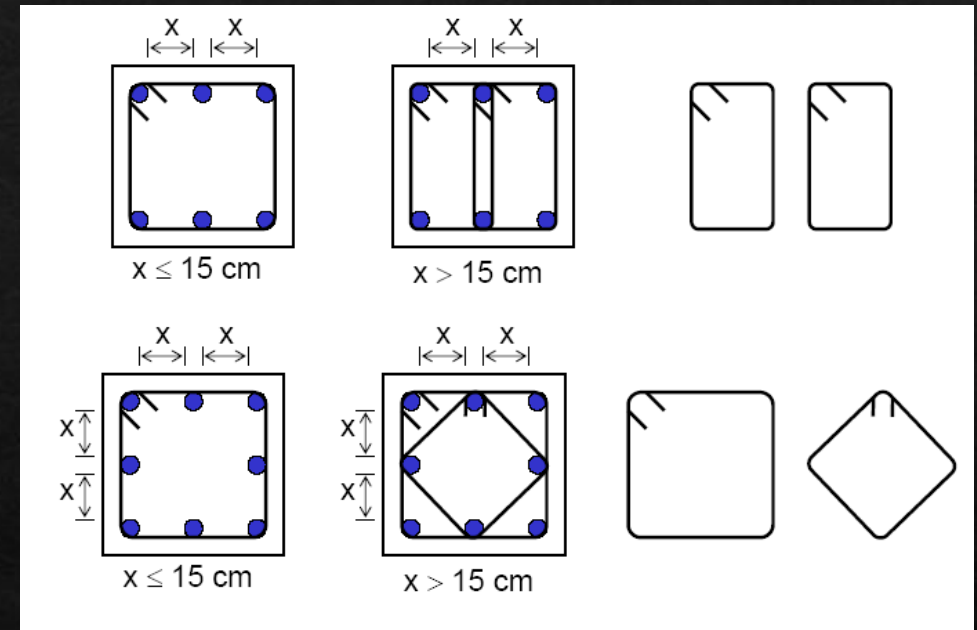


Table 21.2.2—Strength reduction factor ϕ for moment, axial force, or combined moment and axial force

Net tensile strain ϵ_t	Classification	ϕ			
		Type of transverse reinforcement			
		Spirals conforming to 25.7.3		Other	
$\epsilon_t \leq \epsilon_{ty}$	Compression-controlled	0.75	(a)	0.65	(b)
$\epsilon_{ty} < \epsilon_t < \epsilon_{ty} + 0.003$	Transition ⁽¹⁾	$0.75 + 0.15 \frac{(\epsilon_t - \epsilon_{ty})}{(0.003)}$	(c)	$0.65 + 0.25 \frac{(\epsilon_t - \epsilon_{ty})}{(0.003)}$	(d)
$\epsilon_t \geq \epsilon_{ty} + 0.003$	Tension-controlled	0.90	(e)	0.90	(f)

⁽¹⁾For sections classified as transition, it shall be permitted to use ϕ corresponding to compression-controlled sections.

ACI requirements for Columns

◆ Lateral ties and spirals




◆ Ties

◆ Size:

- ◆ $\phi 10$ bar if longitudinal bar $\phi 32$ or smaller
- ◆ $\phi 12$ bar if longitudinal bar $\phi 36$ or larger
- ◆ $\phi 12$ bar if longitudinal bars are bundled

◆ Max spacing

$$\diamond \min \begin{cases} 16d_b \\ 48d_t \\ B \end{cases}$$

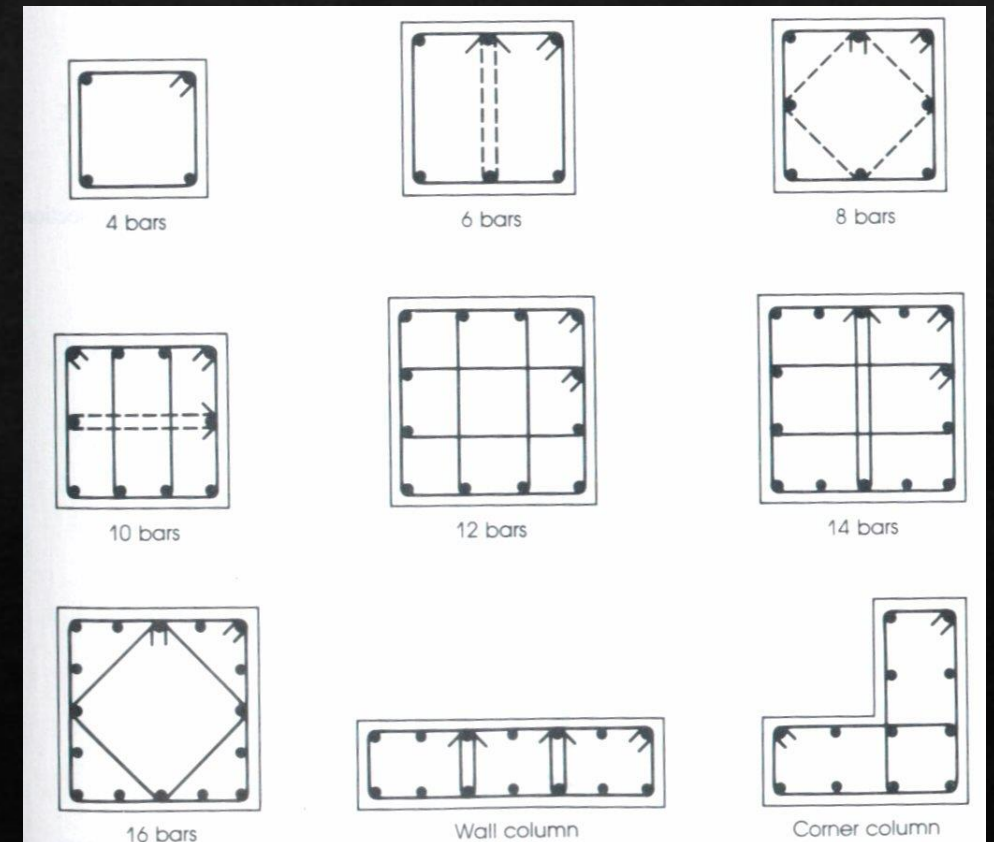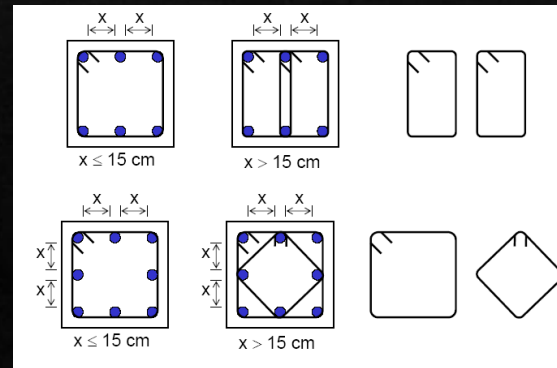

ACI requirements for Columns

◊ Lateral ties and spirals

◊ Spirals

◊ Size:

- ◊ $> \phi 10$ bar

◊ Spacing

- ◊ Minimum 25 mm or d_b
- ◊ Maximum 75 mm
- ◊ The volumetric spiral reinforcement ratio ρ_s

$$\rho_s = \frac{4A_{sp}}{D_c s} > 0.45 \left(\frac{A_g}{A_{ch}} - 1 \right) \frac{f_c}{f_y}$$

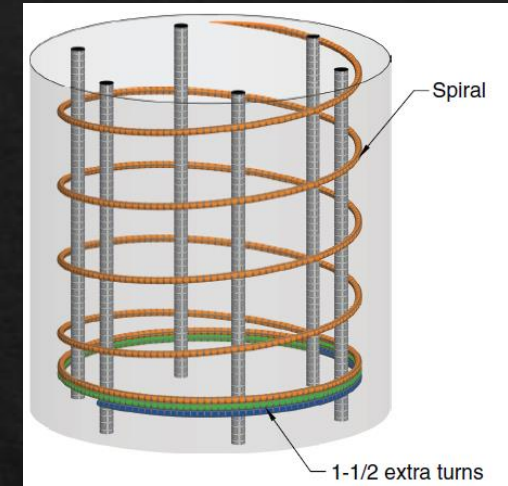
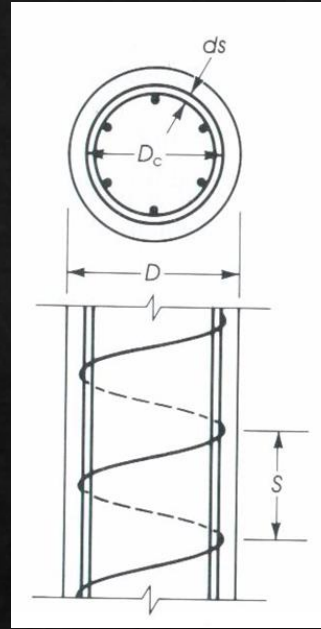


TABLE A.14

Size and pitch of spirals, ACI Code, mm

Diameter of Column, mm	Out to Out of Spiral, mm	f'_c , MPa			
		21	28	35	42
$f_y = 420$ MPa					
350, 375	270, 295	10-65	10-50	13-70	13-55
400-475	320-395	10-65	10-50	13-70	13-60
500	420	10-70	10-50	13-70	13-60
525-725	445-645	10-70	10-50	13-75	13-60
750	670	10-70	10-50	13-75	13-65
$f_y = 550$ MPa					
350-425	270-345	10-85	10-65	10-50	13-75
450, 475	370, 395	10-85	10-65	10-50	13-80
500-550	420-470	10-85	10-65	10-55	13-80
575-700	495-620	10-85	10-70	10-55	13-80
725, 750	645, 670	10-85	10-70	10-55	13-85

Size → Pitch (spacing)


Column Design

◇ Example

A non-slender column is subjected to axial load only. It has the geometry shown and reinforced with $6\phi 30$ as shown. Calculate the maximum ultimate load the column can support.

Use $f_y = 420 \text{ MPa}$ and $f_c' = 28 \text{ MPa}$

$$\phi P_n = r \phi [0.85 f_c' (A_g - A_{st}) + f_y A_{st}]$$

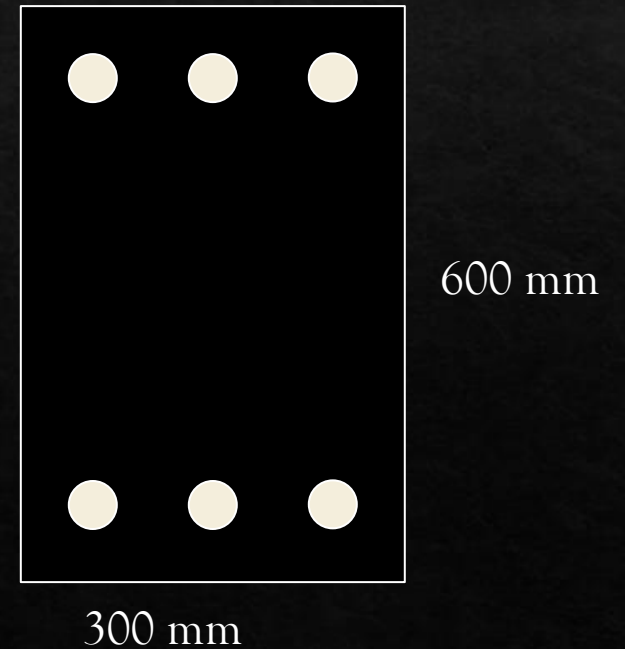


Column Design

◇ Example

A non-slender circular spiral column with a diameter of 450 mm is subjected to axial load only. It has the geometry shown and reinforced with 6 ϕ 28 as shown. Calculate the maximum ultimate load the column can support.

Use $f_y = 420$ MPa and $f_c' = 28$ MPa

$$\phi P_n = r \phi [0.85 f_c' (A_g - A_{st}) + f_y A_{st}]$$

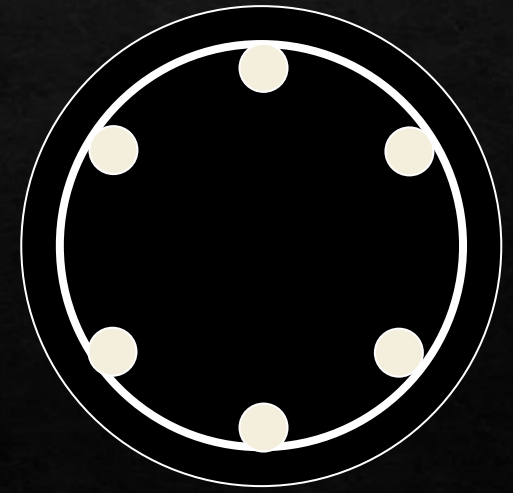

Compare with Example 1 !!!

Column Design

◇ Example

Design a non-slender square column which is subjected to a concentric 2300 kN and 1335 kN dead and live loads, respectively.

[Use $\rho = 0.02$, $f_y = 420 \text{ MPa}$ and $f'_c = 28 \text{ MPa}$]

$$\phi P_n = r \phi [0.85 f'_c (A_g - A_{st}) + f_y A_{st}]$$

$$P_u = 1.2 * D + 1.6 L = 4896 \text{ kN}$$

$$A_{st} = 0.02 A_g, r = 0.8, \phi = 0.65$$

$$\phi P_n = 0.8 * 0.65 [0.85 f'_c (A_g - 0.02 A_g) + f_y * 0.02 A_g]$$

$$4896 * 10^3 = 0.8 * 0.65 * [0.85 * 28 * (0.98 A_g) + 420 * 0.02 * A_g]$$

$$A_g = 296790.6 \text{ mm}^2 \rightarrow B = 544.8 \text{ mm} \sim 550 \text{ mm}$$

Use this value and solve for $A_s = 5592 \text{ mm}^2$


$$\text{use } 12\phi 25 \rightarrow A_{s(\text{provided})} = 6125 \text{ mm}^2$$

Checks:

Reinforcement ratio

Spacing

ϕP_n

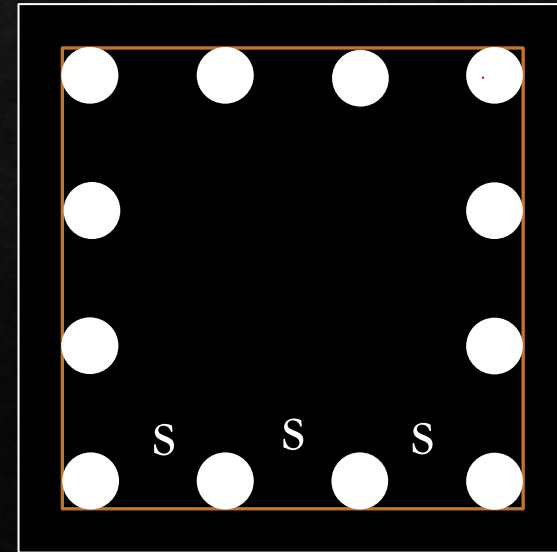

Column Design

◇ Example


Design a non-slender square column which is subjected to a concentric 2300 kN and 1335 kN dead and live loads, respectively.

[Use $\rho = 0.02$, $f_y = 420 \text{ MPa}$ and $f'_c = 28 \text{ MPa}$]

Ties:

Size $\rightarrow \phi 10$ bar if longitudinal bar $\leq \phi 32 \rightarrow$ Use $\phi 10$ ties

$$\text{Spacing} \rightarrow \min \begin{cases} 16d_b \\ 48d_t \\ B \end{cases} \rightarrow \begin{cases} 500 \\ 480 \\ 550 \end{cases} \rightarrow \text{use } 450 \text{ mm spacing}$$

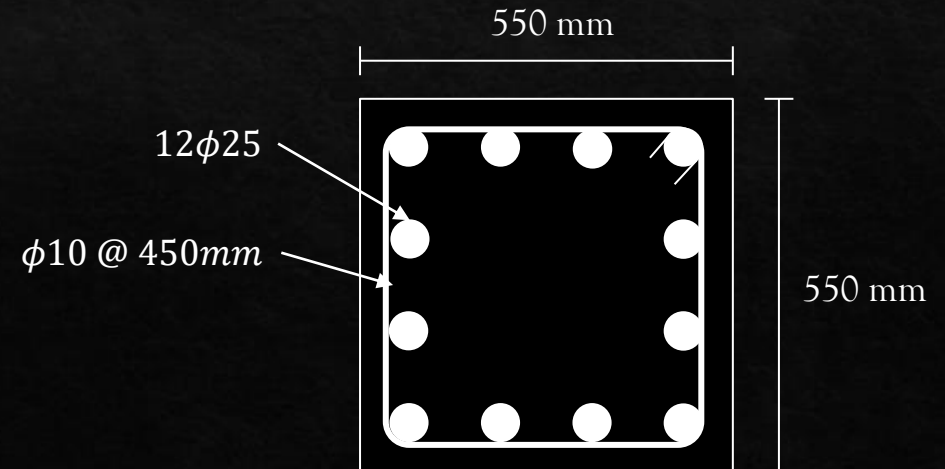

Column Design

◇ Example

Design a non-slender spiraled circular column which is subjected to a concentric 2300 kN and 1335 kN dead and live loads, respectively.

[Use $\rho = 0.02$, $f_y = 420 \text{ MPa}$ and $f'_c = 28 \text{ MPa}$]

$$\phi P_n = r \phi [0.85 f'_c (A_g - A_{st}) + f_y A_{st}]$$

◇ Solution:

$$P_u = 1.2 * D + 1.6 L = 4896 \text{ kN}$$

$$A_{st} = 0.02 A_g, r = 0.85, \phi = 0.7$$


$$\phi P_n = 0.85 * 0.7 [0.85 f'_c (A_g - 0.02 A_g) + f_y * 0.02 A_g]$$

$$4896 * 10^3 = 0.8 * 0.65 * [0.85 * 28 * (0.98 A_g) + 420 * 0.02 * A_g]$$

$$A_g = 259380 \text{ mm}^2 \rightarrow D = 574.7 \text{ mm} \sim 600 \text{ mm}$$

Use this value and solve for $A_s = 3785 \text{ mm}^2$

use 10 ϕ 22 $\rightarrow A_{s(\text{provided})} = 3870 \text{ mm}^2$

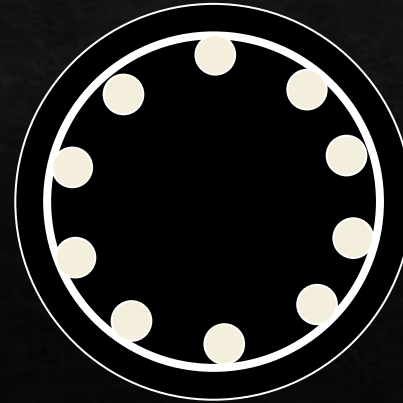

Column Design

◇ Example

Design a non-slender spiraled circular column which is subjected to a concentric 2300 kN and 1335 kN dead and live loads, respectively.

[Use $\rho = 0.02$, $f_y = 420 \text{ MPa}$ and $f'_c = 28 \text{ MPa}$]

◇ Solution:

Check:

$$\rho = \frac{3870}{\frac{\pi}{4} 600^2} = 0.0134 \dots \dots ok$$

$$\phi P_n = 0.8 * 0.7 * \left[0.85 * 28 * \left(\frac{\pi}{4} 600^2 - 3870 \right) + 420 * 3870 \right]$$

$$\phi P_n = 4916 \text{ kN} > P_u \dots \dots ok$$

Spiral

Size $\rightarrow \phi 10$

Spacing \rightarrow Table A14 \rightarrow Column diameter = 600 mm

spiral out to out = 520 mm

\rightarrow Pitch 50 mm

