


Example: Calculate the Moment capacity of the given cross-section

$$f_y = 420 \text{ MPa} \dots \dots f'_c = 21 \text{ MPa}$$



$$\rightarrow A_s f_y$$

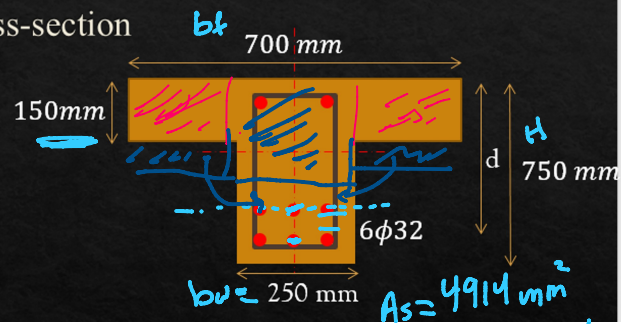

assume rect

$$C = T$$


$$0.85 f'_c a b_f = A_s f_y$$

$$a = 165.2 \text{ mm} > h_f$$

$$d = h - 40 - 10 - 3 \times \frac{32}{2} - \frac{16}{2}$$

$$d = 620 \text{ mm}$$

T-section



$$\phi M_n$$

$$= \phi M_{nf} + \phi M_{nw}$$

for the flange ①

$$T_1 = C_f$$

$$A_{sf} f_y = 0.85 f'_c h_f (b_f - b_w) \rightarrow A_{sf} = 2869 \text{ mm}^2$$

$$A_{sw} = 2045 \text{ mm}^2 \dots \text{later}$$

$$\phi M_{nf} = \phi \text{ force} \times \text{arm}$$

$$\phi M_{nf} = \phi A_{sf} f_y \left(d - \frac{h_f}{2} \right) = 591 \text{ kN.m}$$

$$\phi = 0.9$$



for the web

$$T_2 = C_w$$


$$A_{sw} f_y = 0.85 f'_c b w a$$

$$a = 192.5 \text{ mm}$$

$$\phi M_{nw} = \phi f \times A$$

$$\phi A_{sw} f_y (d - \frac{a}{2}) = 404.9 \text{ kN.m}$$

$$\phi M_n = 591 + 404.9 \text{ kN.m} = 995.9 \text{ kN.m}$$



check $\phi \rightarrow E_s$

$$\bar{y} = \frac{q}{B_1} \rightarrow E_s = 0.0052 > 0.0025$$

$$\phi = 0.9$$

Design: $f_y = 420 \text{ MPa}$ $f'_c = 21 \text{ MPa}$

$$+M_n = 750 \text{ kN.m}$$


Assume $N.A(a) < h_f \rightarrow \text{rect. section}$ $d = 500 \text{ mm}$ $b = 1200 \text{ mm}$

$$R = \frac{M_n}{\phi b d^2} = \frac{750 \times 10^6}{0.9 \times 1200 \times 500^2} = 2.78 \text{ MPa} \rightarrow \rho = 0.00723$$

$$A_s = \rho b d = 4338 \text{ mm}^2$$

check $a \rightarrow T = C \rightarrow A_s f_y = 0.85 f'_c a b \rightarrow a = 85 \text{ mm}$

$a > h_f \rightarrow T\text{-section}$

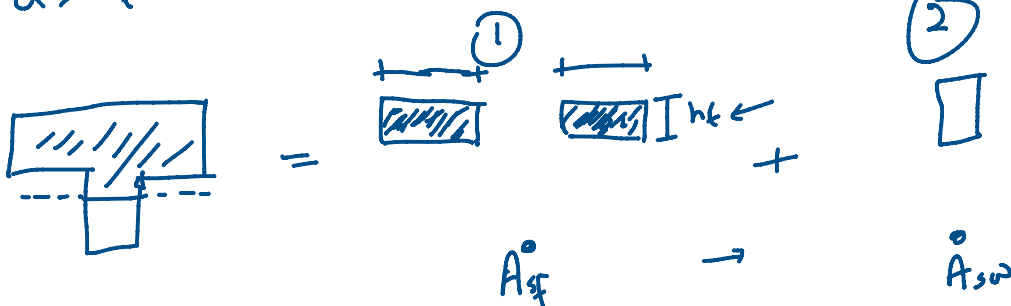

①

$$A_s f_y = 0.85 f'_c (b_f h_f - b h) \rightarrow A_{sf} = 2948 \text{ mm}^2$$

① $\phi M_{nf} \rightarrow C_f = T_f \Rightarrow 0.85 f_c' h_f (b_f - b_w) = A_{sf} f_y \rightarrow A_{sf} = 2948 \text{ mm}^2$
 $\phi M_{nf} = \phi A_{sf} f_y (d - \frac{h_f}{2}) = 521.6 \text{ kN}\cdot\text{m}$

② $\phi M_{nu} = 750 - 521.6 = 228.4 \text{ kN}\cdot\text{m}$

option 1:

$\phi M_{nu} = \phi A_{sw} f_y (d - \frac{a}{2}) \xleftrightarrow{\text{itr}} \begin{aligned} T &= C \\ A &= \frac{A_{sw} f_y}{0.85 f_c' b_w} \end{aligned}$

275mm




$d = 500 \text{ mm}$

option 2: $R = \frac{M_u}{\phi b d^2} = \frac{228.4 \times 10^6}{0.9 \times 275 \times 500^2} \rightarrow \phi \rightarrow A_{sw}$
 $R = 3.69 \rightarrow \rho = 0.0099 \rightarrow A_{sw} = 1367 \text{ mm}^2$
 $a = 117 \text{ mm} \rightarrow \bar{y} = 137.6 \text{ mm}$
 $E_s = 7.9 \times 10^3 > 0.005$
 $\phi = 0.9$

$A_s = A_{sf} + A_{sw} = 4315 \text{ mm}^2$

#	A_s
7 $\phi 29 \rightarrow$	4515
9 $\phi 25 \rightarrow$	4590
3 $\phi 43 \rightarrow$	4365
6 $\phi 32 \rightarrow$	<u>4914</u>

Spacing, ϕM_n



$b_w = 2(40) + 2(10) + 3(43) + 2S$

$S = 23 \text{ mm}$

$b_w = \dots \rightarrow 3(25) + 2S$
 $S = 62.5 \text{ ok}$

