



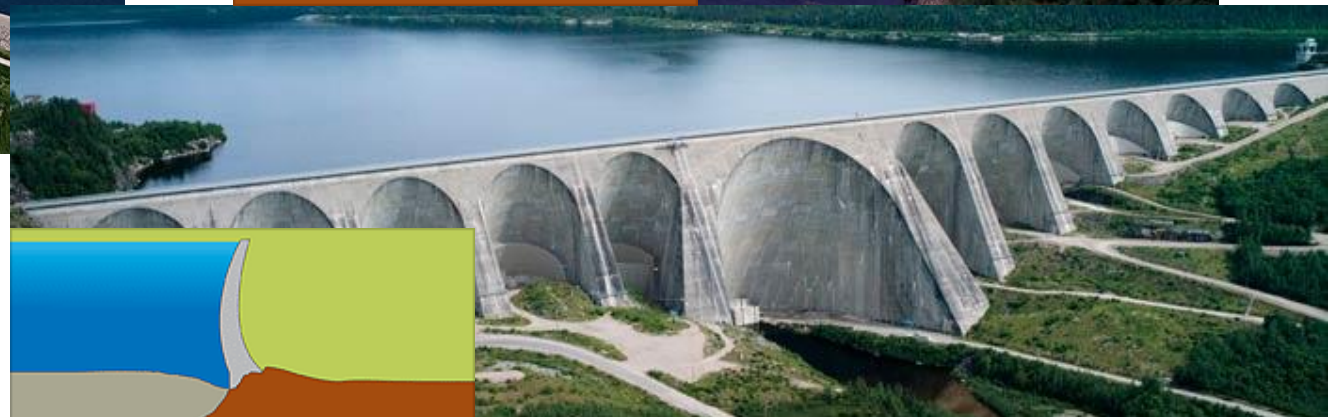

Dr. Khalil Qatu

ENCE 331: Seepage

Seepage flow

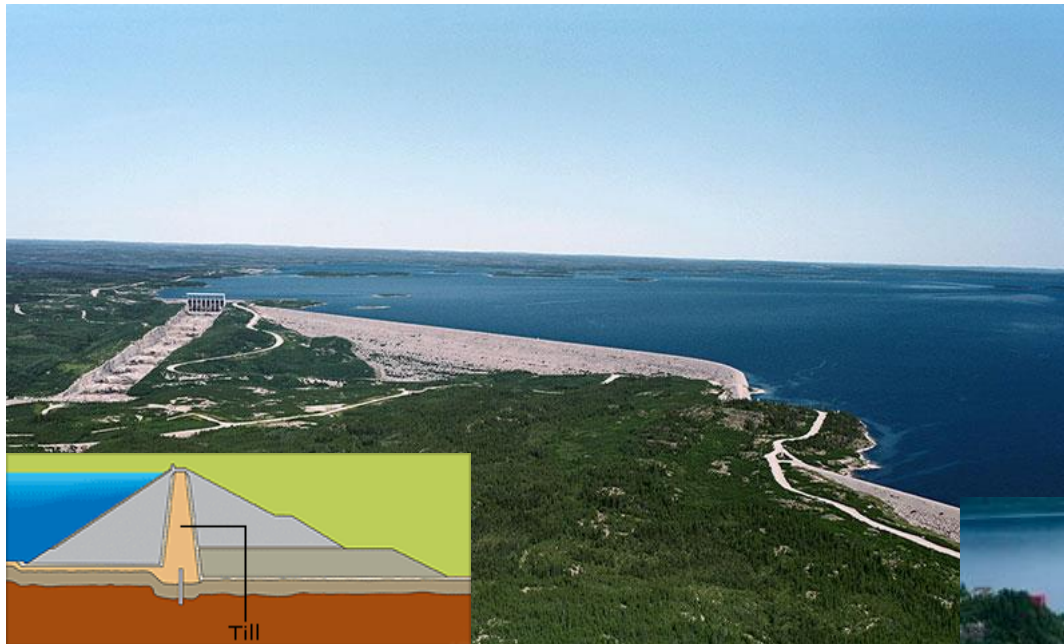



Seepage flow


$$\left[\left(v_x + \frac{\partial v_x}{\partial x} dx \right) dz dy + \left(v_z + \frac{\partial v_z}{\partial z} dz \right) dx dy \right] - [v_x dz dy + v_z dx dy] = 0$$

$$\frac{\partial v_x}{\partial x} + \frac{\partial v_z}{\partial z} = 0$$

$$v_x = k_x i_x = k_x \frac{\partial h}{\partial x}$$

$$v_z = k_z i_z = k_z \frac{\partial h}{\partial z}$$


$$k_x \frac{\partial^2 h}{\partial x^2} + k_z \frac{\partial^2 h}{\partial z^2} = 0 \longrightarrow \frac{\partial^2 h}{\partial x^2} + \frac{\partial^2 h}{\partial z^2} = 0$$

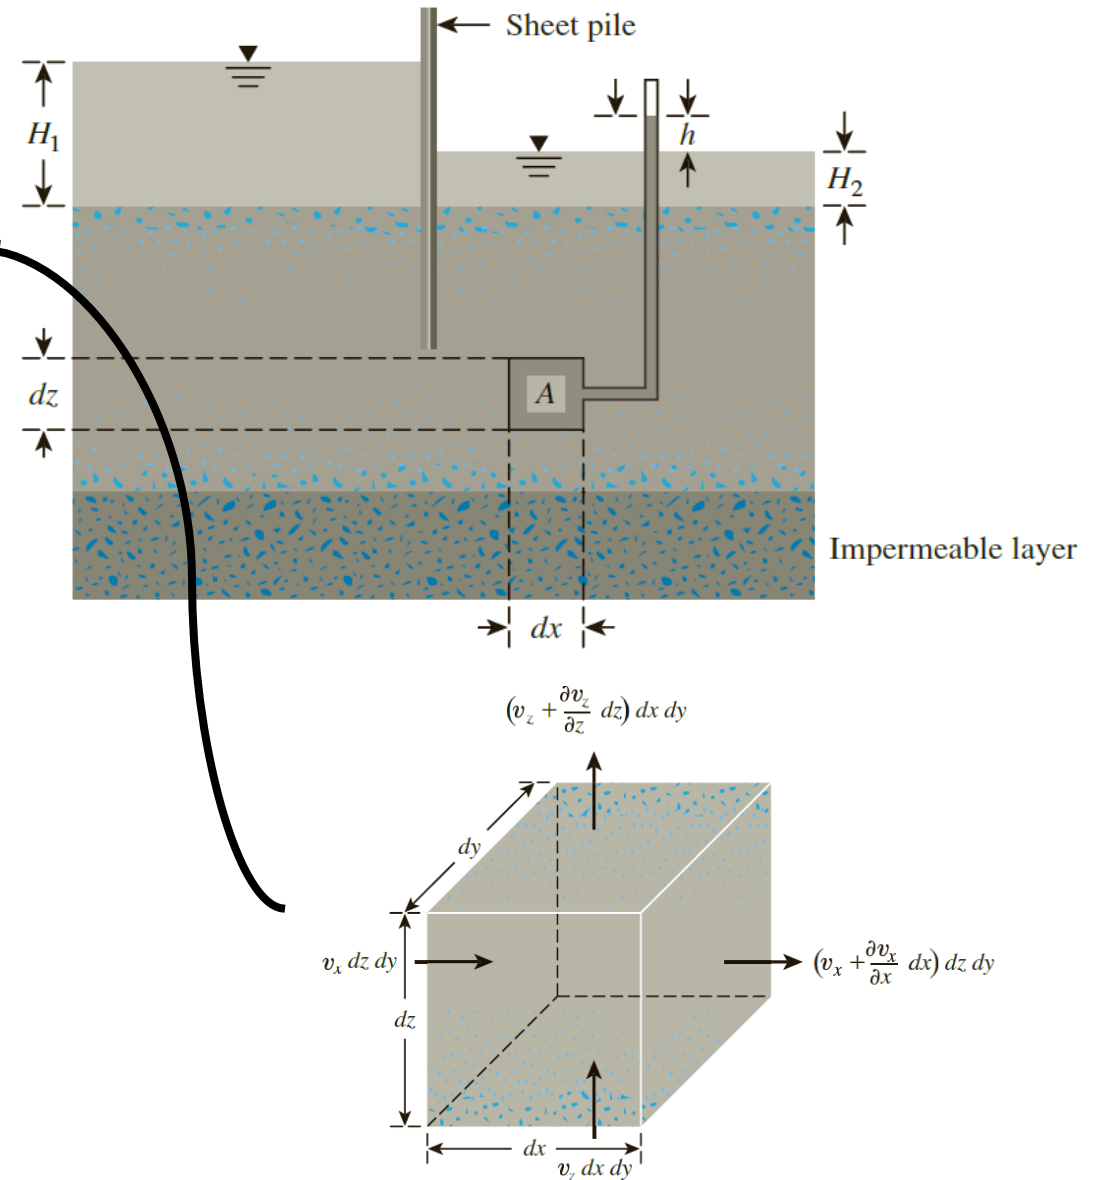

Laplace continuity Equation



$$\frac{\partial^2 h}{\partial x^2} + \frac{\partial^2 h}{\partial z^2} = 0$$

- Two-dimensional Second order differential equation
- The solution for this equation is divided into two orthogonal family of curves:
 - Equipotential curves: a line represents the points that have the same total energy
 - Flow line: a line along which a water particle will travel from upstream to downstream

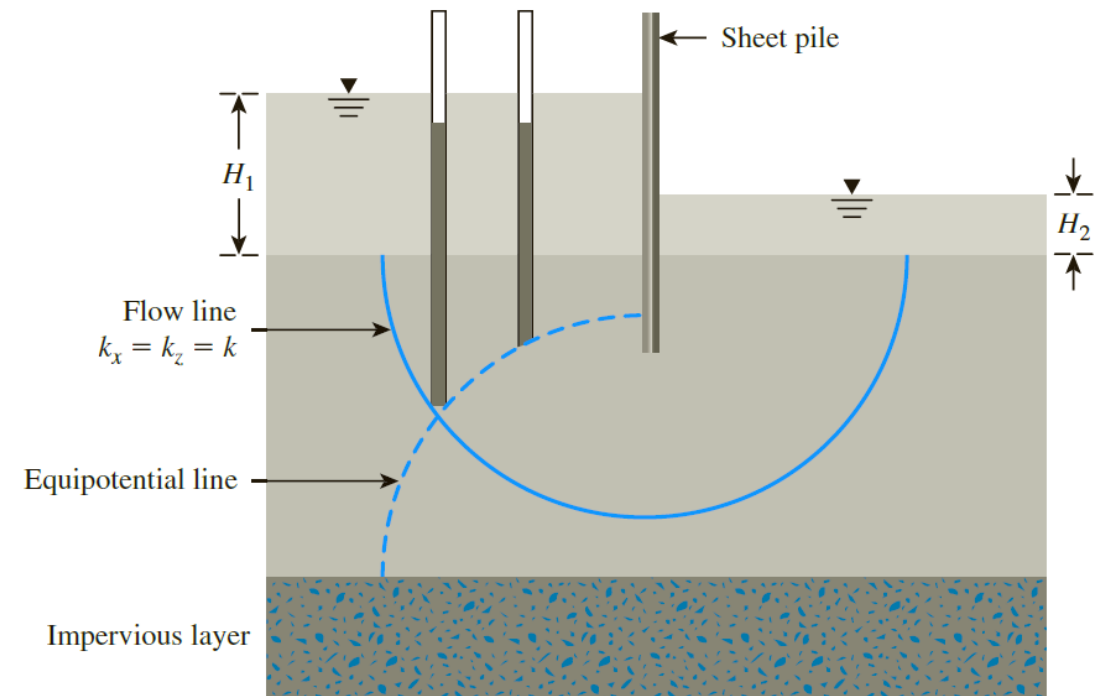

Flow nets

- The equipotential lines intersect the flow lines at right angles.
- The flow elements formed are approximate squares.
- The area between flow lines is called a flow channel (flow rate in all channels are the same)
- The difference in total head between two adjacent equipotential lines is called Potential drop
- Flow lines and equipotential lines must agree with B.C.
 - The upstream and downstream surfaces of the permeable layer (lines ab and de) are **equipotential line**
 - Because ab and de are equipotential lines, all the flow lines intersect them at **right angles**.
 - The boundary of the impervious layer—that is, line fg—is a **flow line**, and so is the surface of the impervious sheet pile, line acd.
 - The equipotential lines intersect acd and fg at right angles.

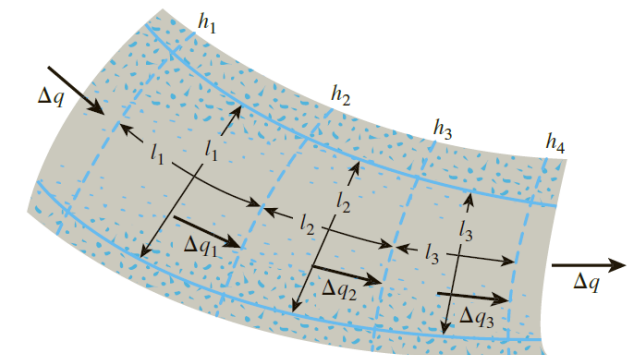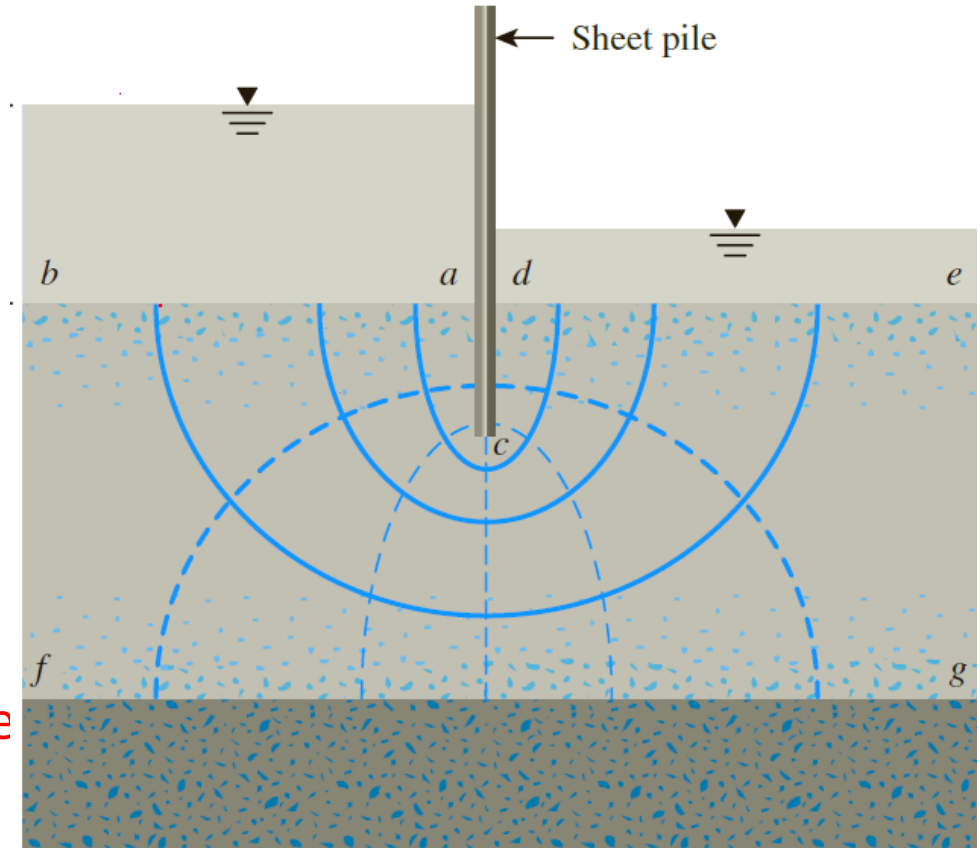

Why flow nets ??

- Head distribution

$$(N_d), (N_f) \rightarrow ?? \quad h_1 - h_2 \rightarrow \frac{H}{N_d}$$



- Flow rate

$$\Delta q = k \cdot \frac{h_1 - h_2}{l_1} \cdot l_1 \quad q = kiA \rightarrow q = k \frac{H}{N_d} N_f$$

- Gradient distribution

- Discharge velocity



- Pore water pressure

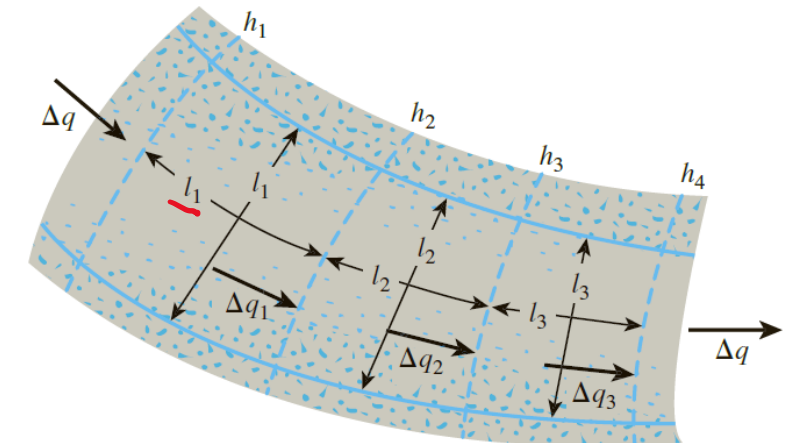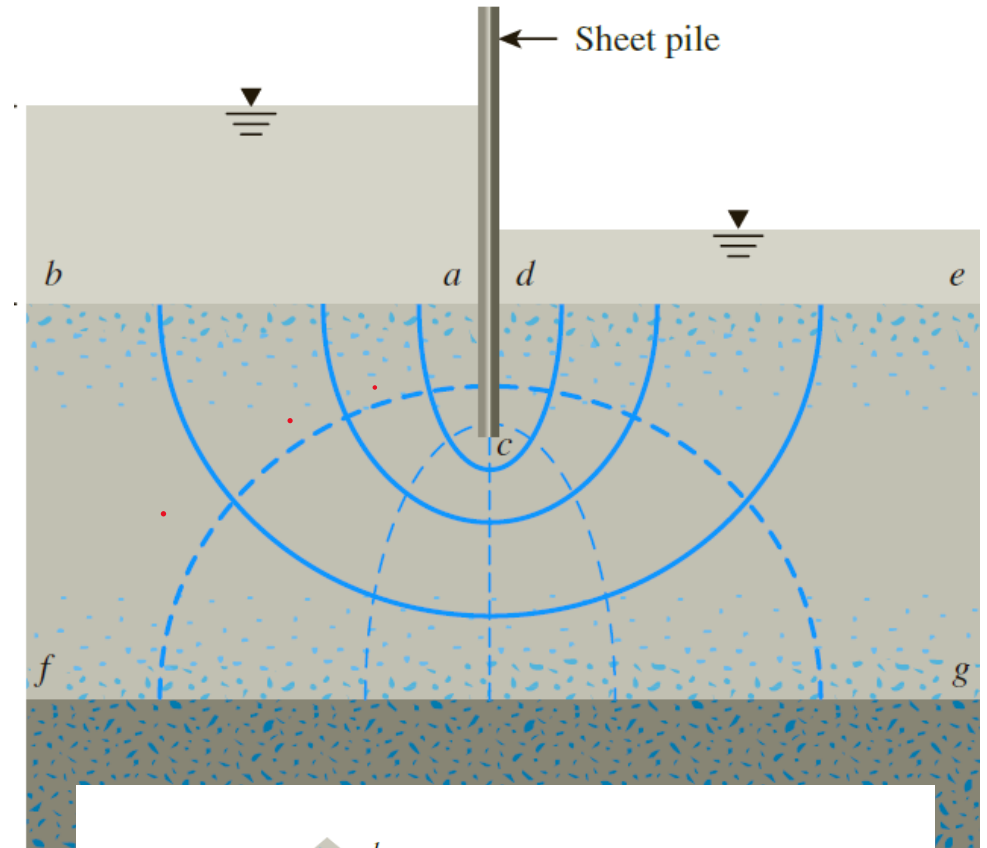


How to draw a good flow net

- Use pencil and draw to scale
- Start by marking B.C.s in ink
- Drawing is an iteration process (sketch then correct mistakes)
- Draw flow lines first (3-5 flow channels are usually sufficient)
- Draw equipotential lines (take symmetry into account).
- You can get partial head drops or partial flow channel
- Don't over complicate it.


Examples

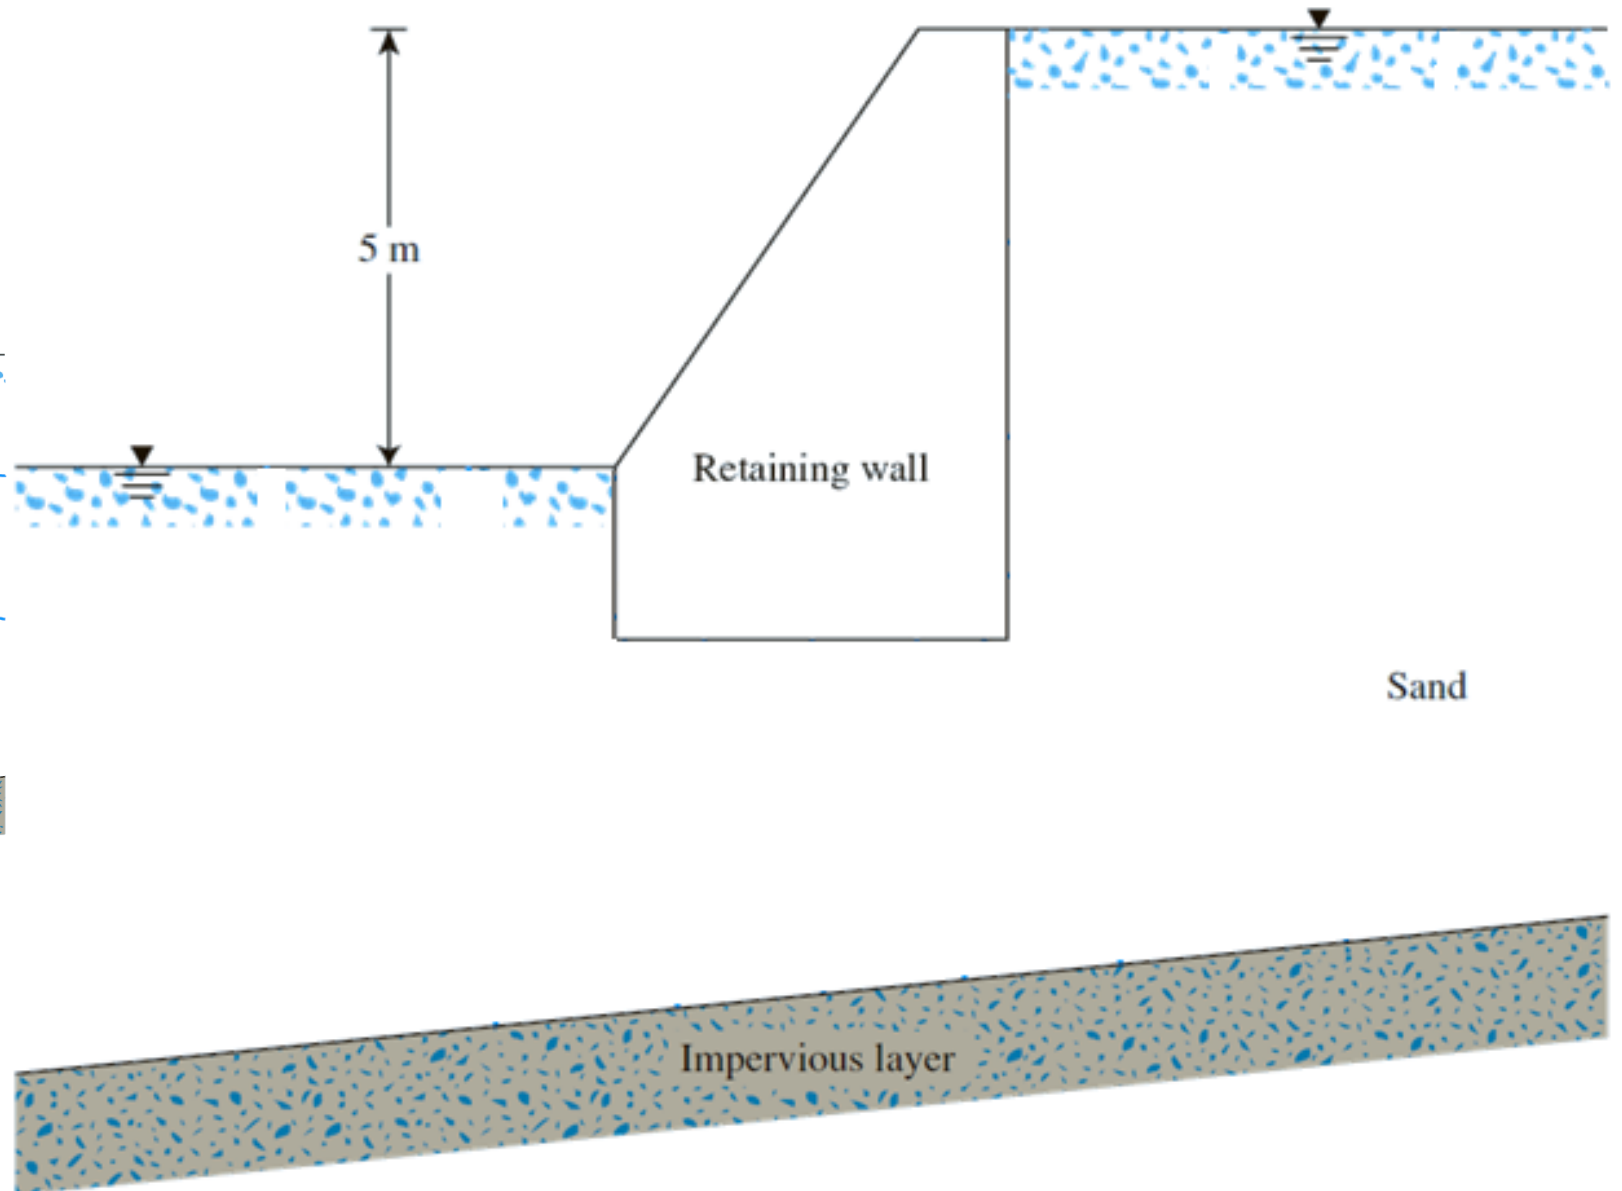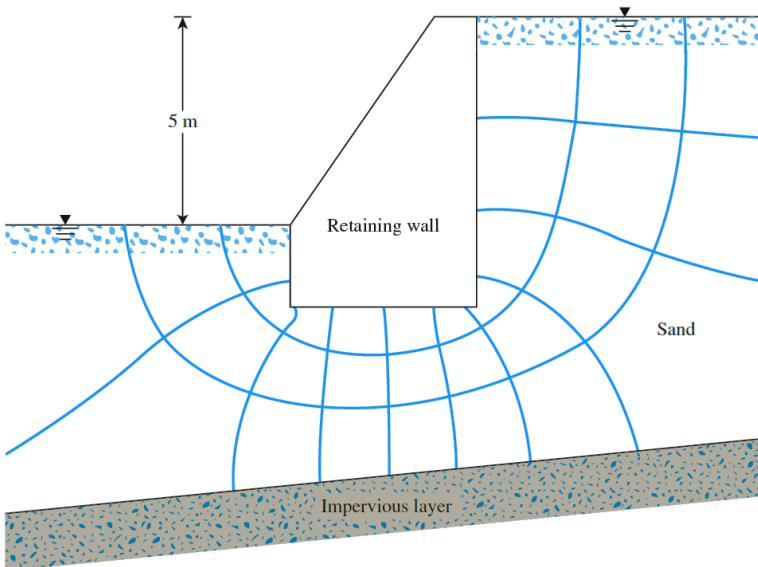



Examples

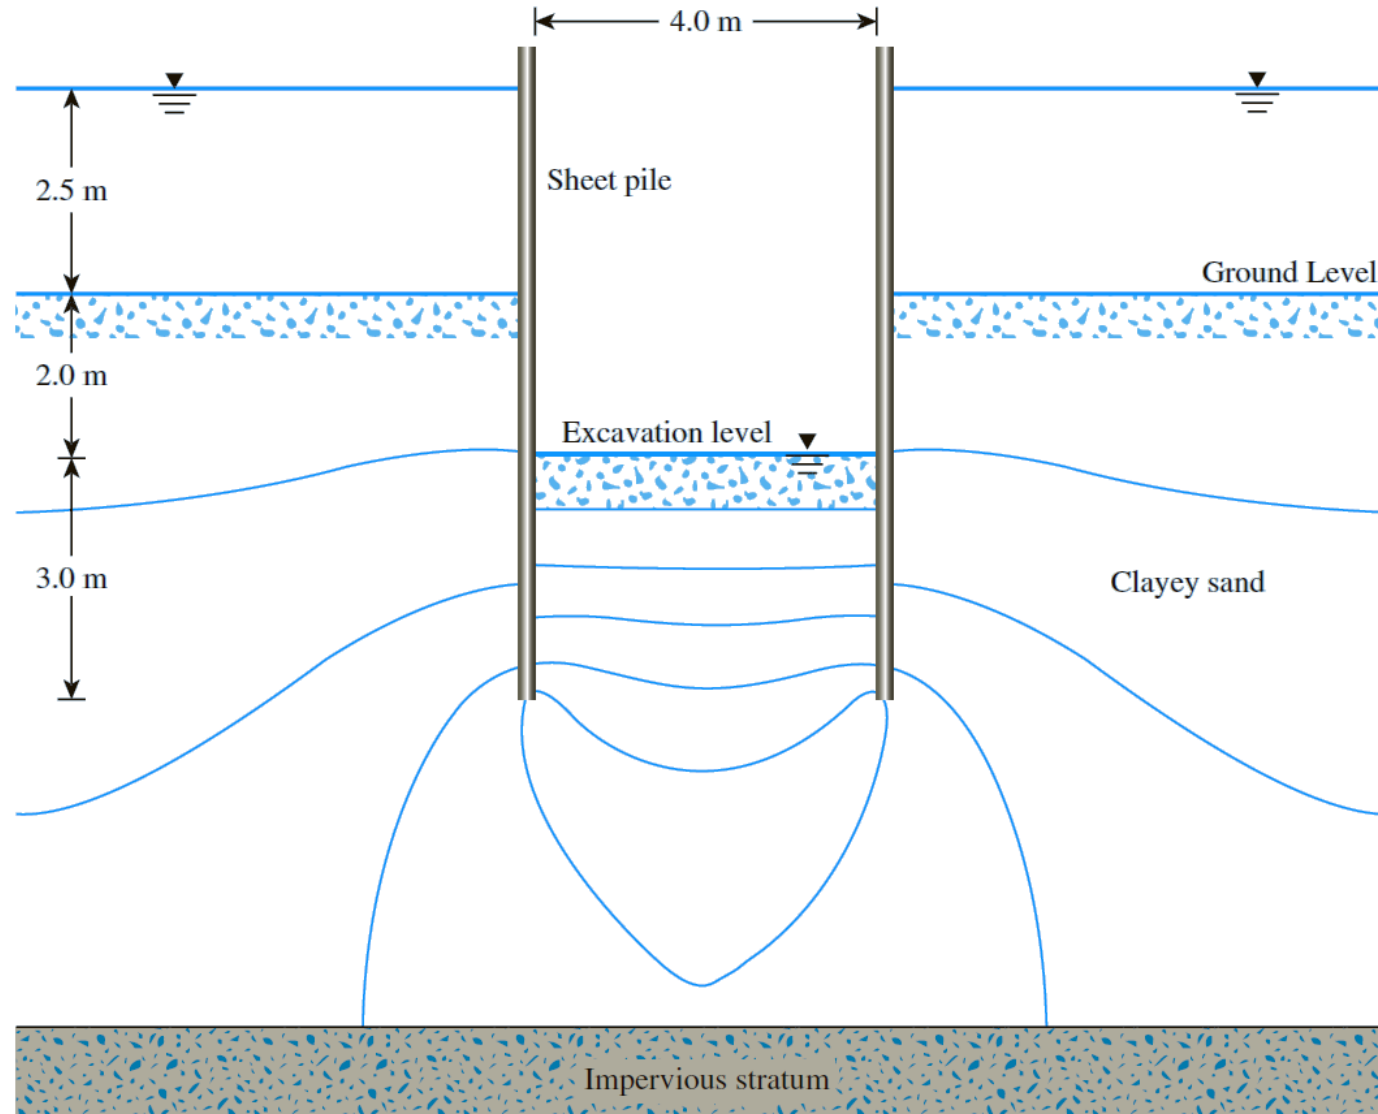

Examples

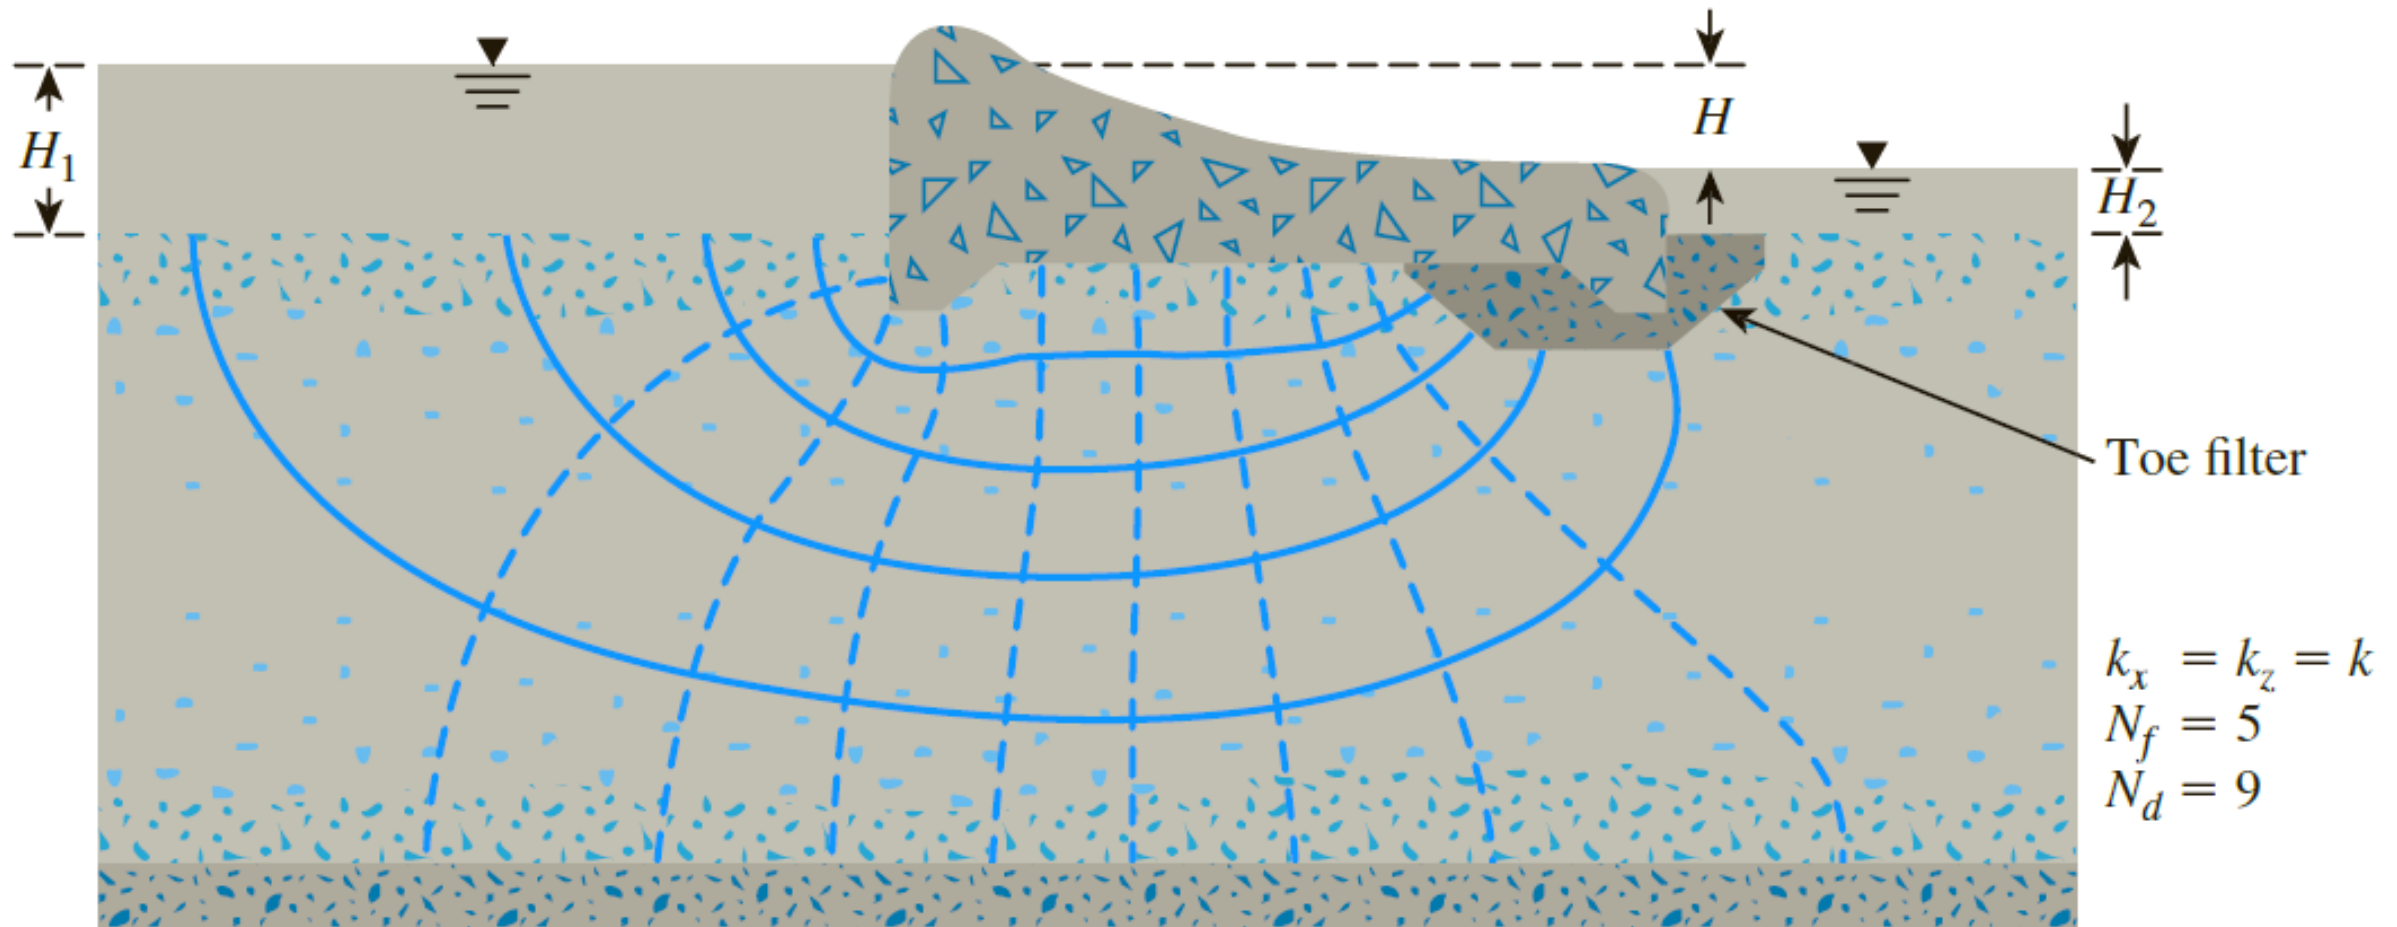


Examples

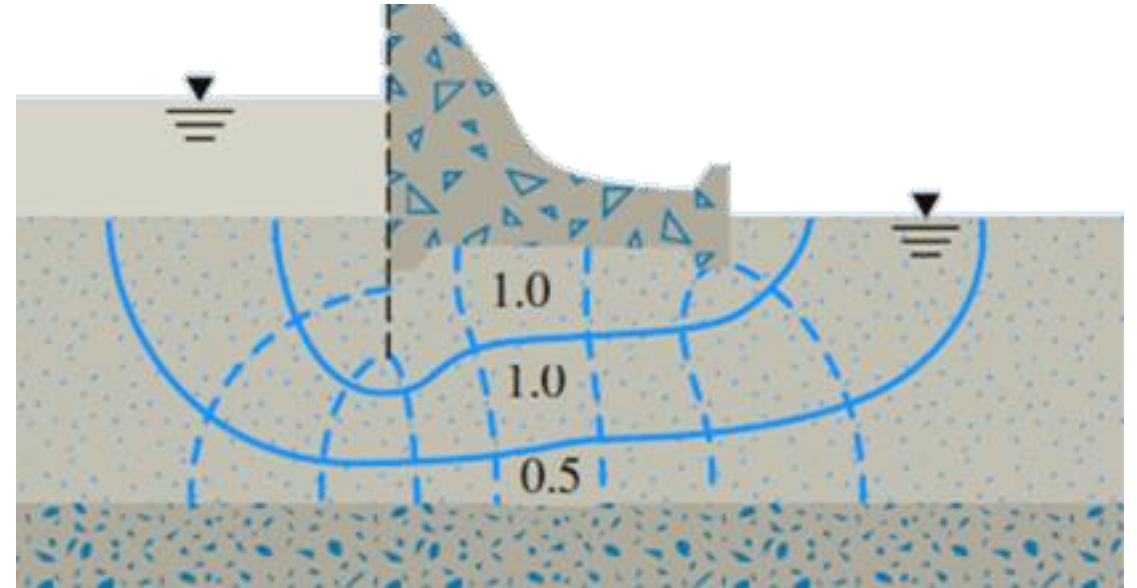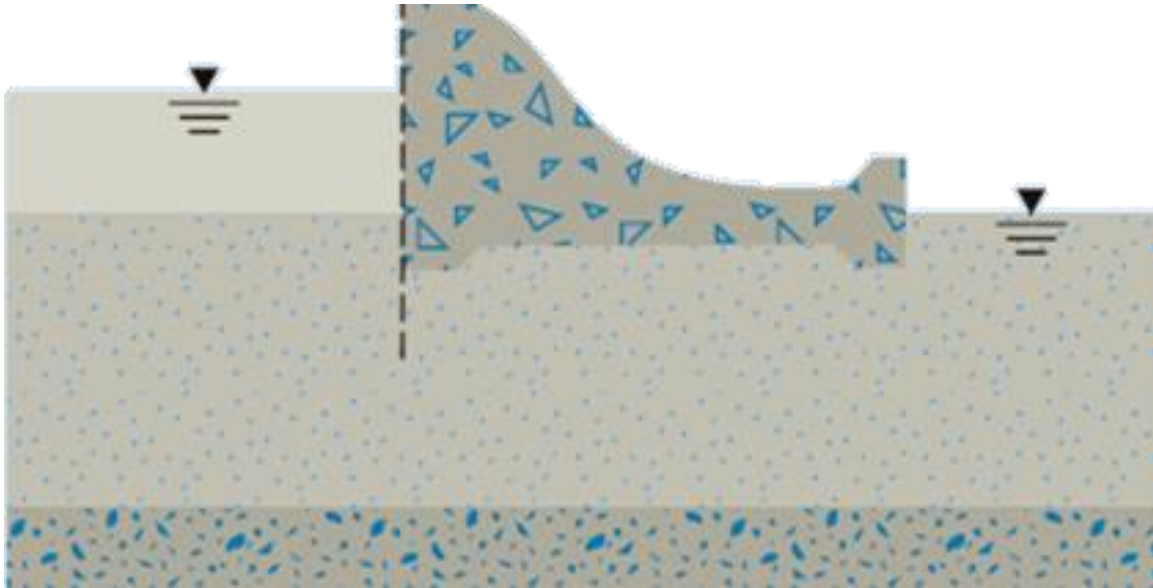

Example


The hydraulic conductivity of the sand is 1.5×10^{-5} cm/s. The retaining wall is 50 m long. Determine:

- The quantity of seepage across the entire wall per day.
- The total head, elevation head, and pressure head at point A.
- The total uplift force on the retaining wall
- The exit gradient at point B.

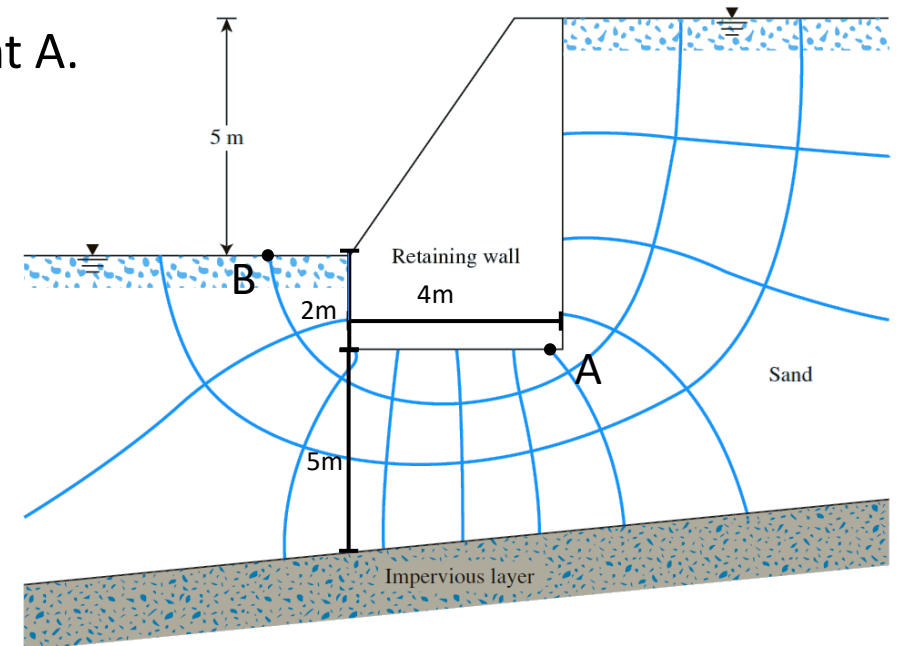


Example


The hydraulic conductivity of the sand is 1.5×10^{-5} cm/s. The retaining wall is 50 m long. Determine:

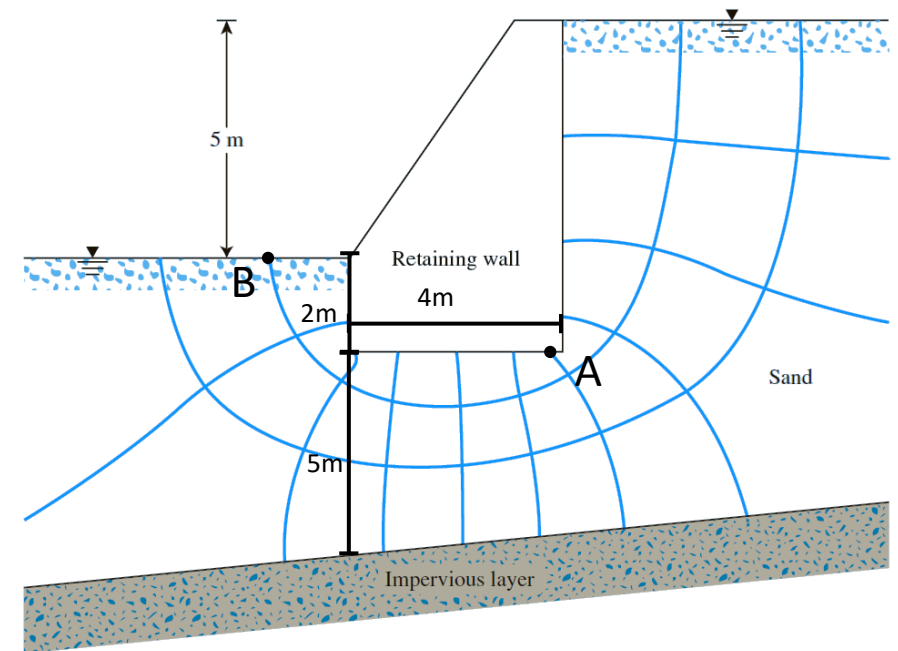

Example

The hydraulic conductivity of the soil below the dam is 5.3×10^{-5} cm/s.
Determine:

- The quantity of seepage across the entire wall per day.
 - The total head, elevation head, and pressure head at point A.
 - The total uplift force on the dam
 - The exit gradient at point B.
- 

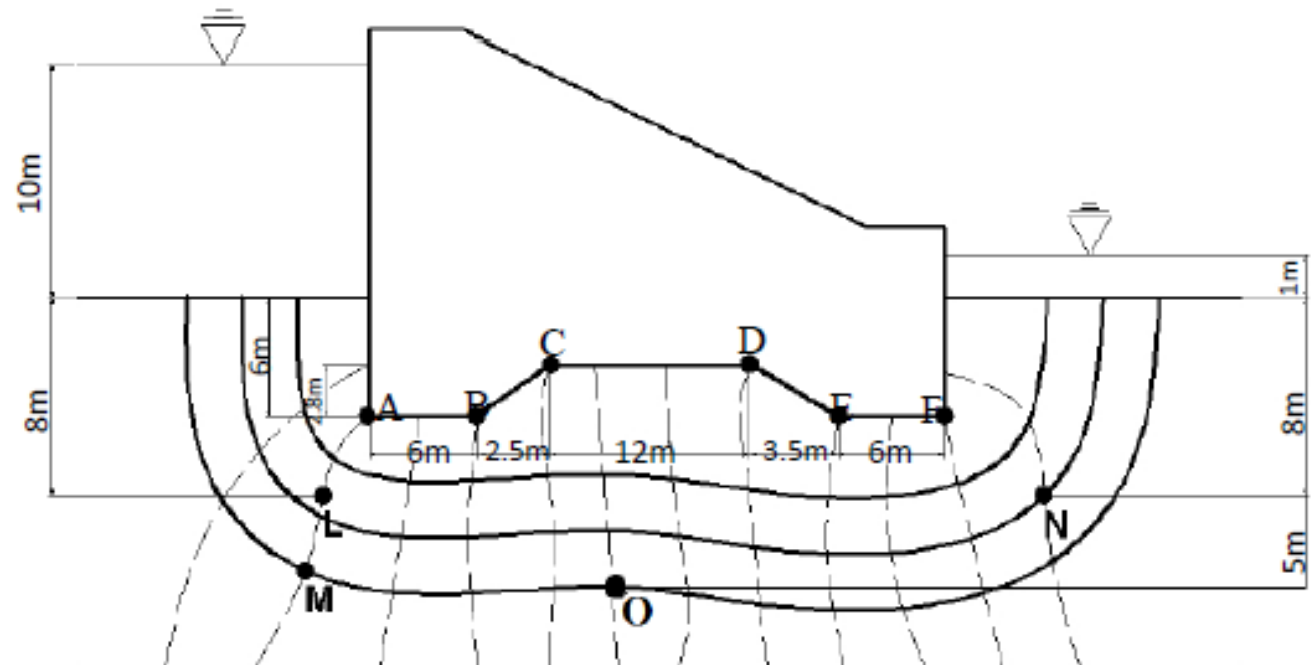



Anisotropic soil

$$\frac{\partial^2 h}{(k_z/k_x) \partial x^2} + \frac{\partial^2 h}{\partial z^2} = 0$$

$$x' = \sqrt{k_z/k_x} x$$

$$q = \sqrt{k_x k_z} \frac{HN_f}{N_d}$$

$$k_x \frac{\partial^2 h}{\partial x^2} + k_z \frac{\partial^2 h}{\partial z^2} = 0$$

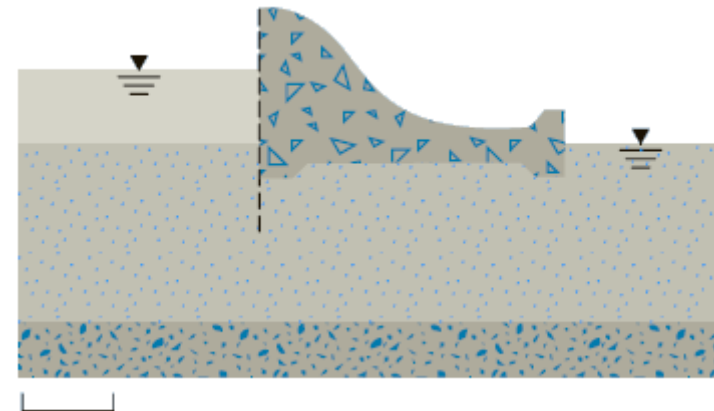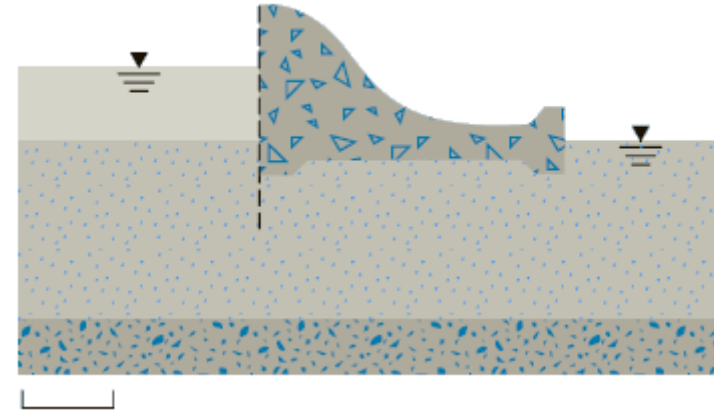


Earthen Dam on impervious soil

$$q = k L \sin \alpha \tan \alpha$$

$$L = \frac{d}{\cos \alpha} - \sqrt{\frac{d^2}{\cos^2 \alpha} - \frac{H^2}{\sin^2 \alpha}}$$

- Step 1.** Obtain α .
- Step 2.** Calculate Δ (see Figure 8.15) and then 0.3Δ .
- Step 3.** Calculate d .
- Step 4.** With known values of α , H and d , calculate L
- Step 5.** With known value of L , calculate q

Schaffernak's Solution
 $\alpha < 30^\circ$

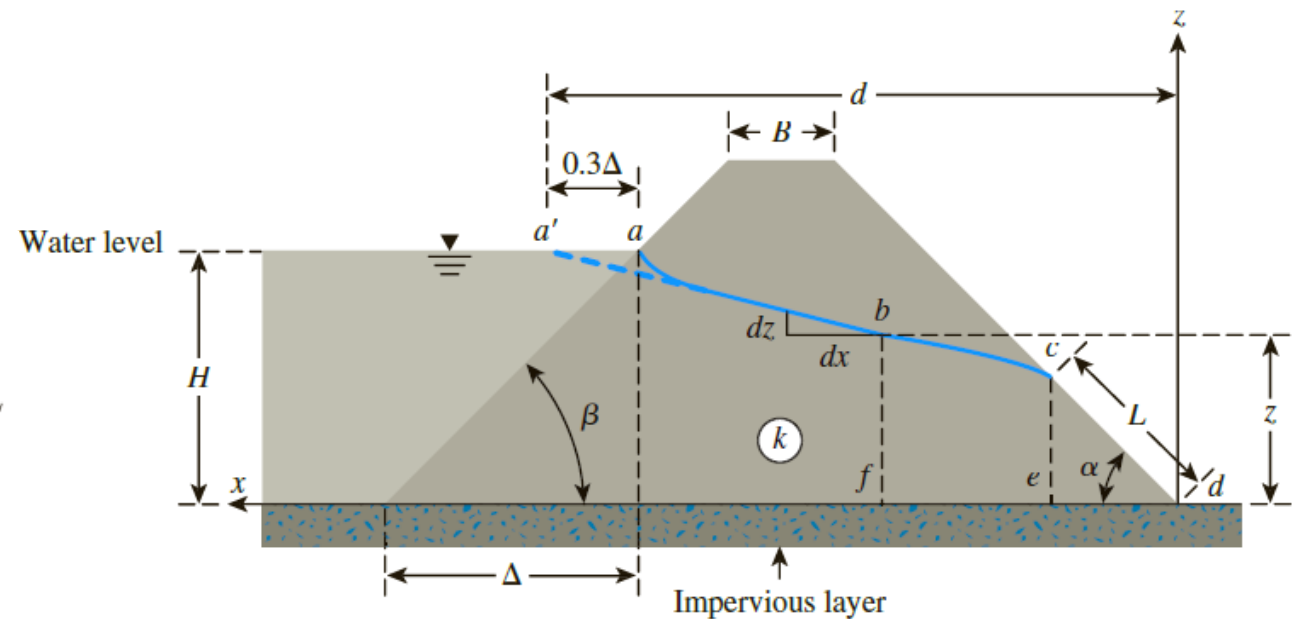


Earthen Dam on impervious soil

Casagrande's Solution


$$q = k L \sin^2 \alpha$$

$$L = \sqrt{d^2 + H^2} - \sqrt{d^2 - H^2 \cot^2 \alpha}$$


- Step 1.** Obtain α .
- Step 2.** Calculate Δ (see Figure 8.15) and then 0.3Δ .
- Step 3.** Calculate d .
- Step 4.** With known values of α , H and d , calculate L
- Step 5.** With known value of L , calculate q

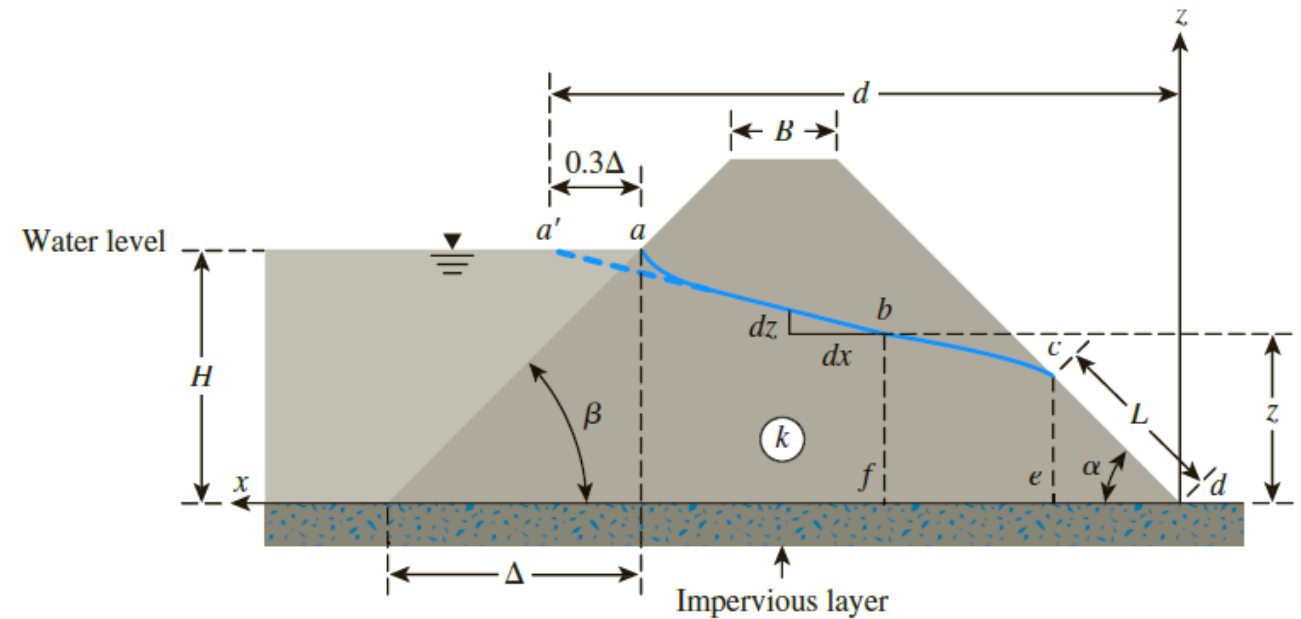

Earthen Dam on impervious soil

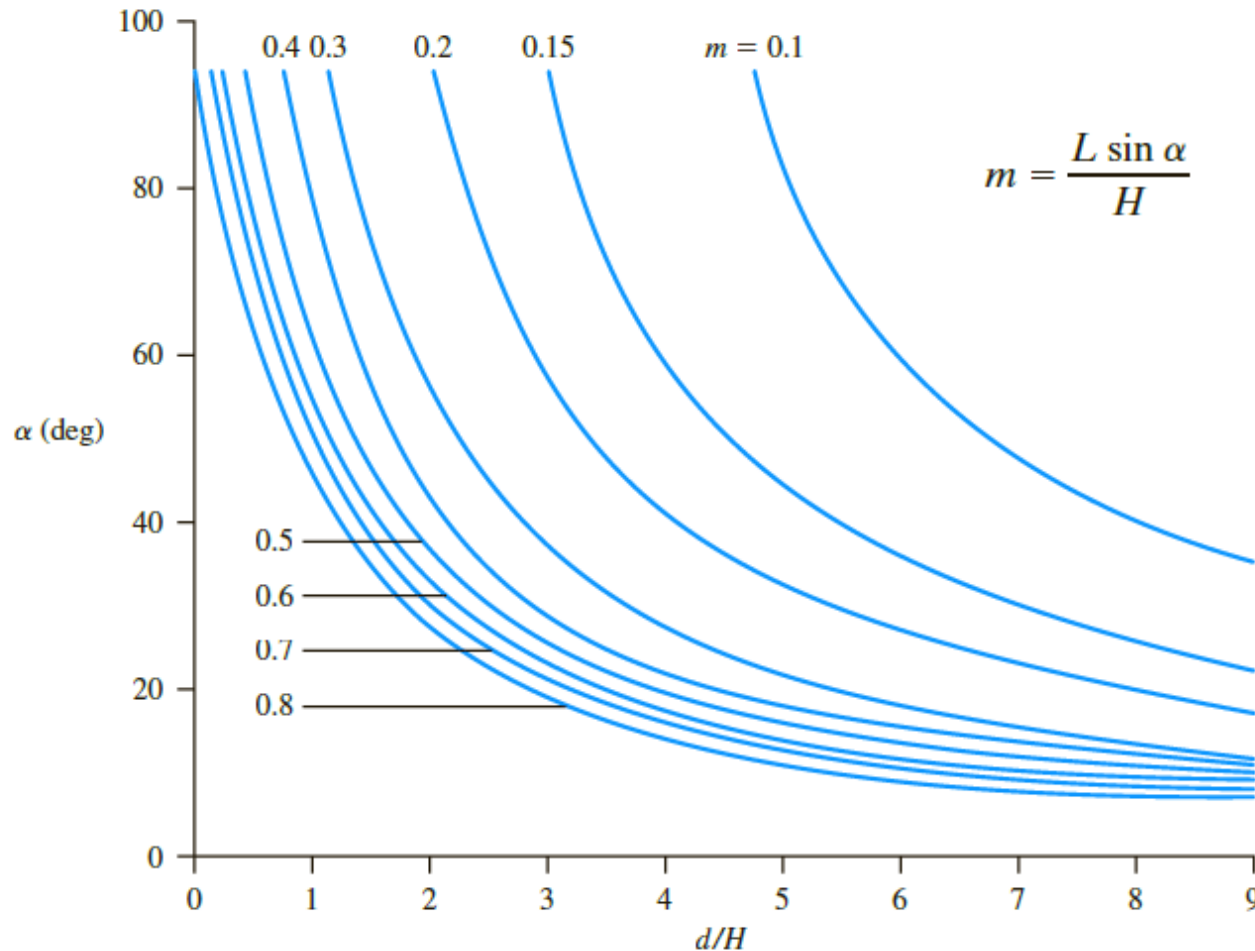

Casagrande's Solution

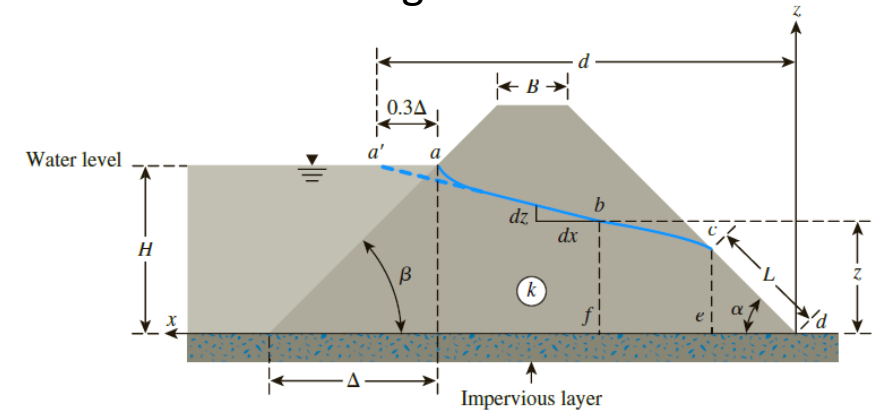

- Step 1.** Determine d/H .
- Step 2.** For a given d/H and α , determine m .
- Step 3.** Calculate $L = \frac{mH}{\sin \alpha}$.
- Step 4.** Calculate $q = kL \sin^2 \alpha$.