


Faculty of Engineering and Technology Department of Computer Science

Introduction to Computers and Programming (Comp 133)

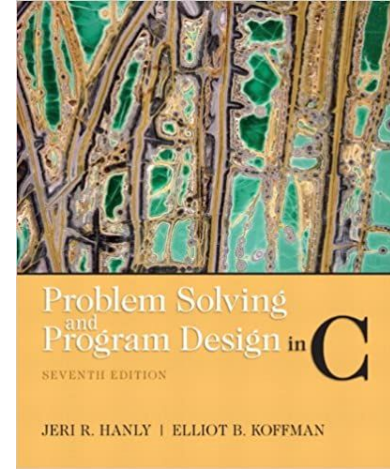

References :

Book : Problem Solving and Program Design in C (7th Edition)

Slides : Dr. Radi Jarrar , Dr. Abdallah Karakra , Dr. Majdi Mafarja.

STUDENTS-HUB.com

Selection Structures: If and Switch

Chapter 4


Control structures

- **Control structure** a combination of individual instructions into a single logical unit with one entry point and one exit point.
- **Compound statement** a group of statements bracketed by { and } that are executed sequentially.
- **Selection control structure** a control structure that chooses among alternative program statements.
- **Condition** an expression that is either false (represented by 0) or true (usually represented by 1)


Control structures

Types of control structures

- Sequence
 - Programs executed statements sequentially
- Selection
 - If
 - if...else
 - switch
- Repetition
 - While
 - do...while
 - for

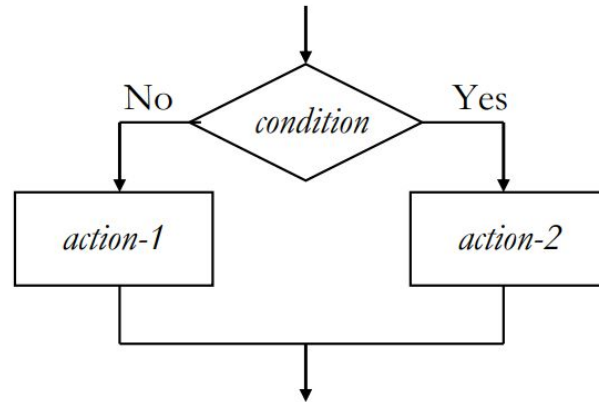

Selection structure

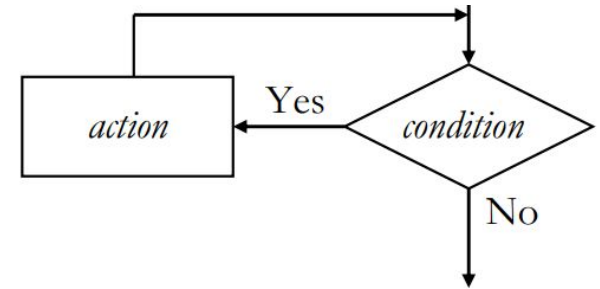

Repetition structure



Chapter 4

- Selection Structures

Selection Structures

Relational and Equality Operators

- variable relational-operator variable ($x > y$)
- variable relational-operator constant ($x > 10$)
- variable equality-operator variable ($x == y$)
- variable equality-operator constant ($x != 5$)

Selection Structures

TABLE 4.1 Relational and Equality Operators

Operator	Meaning	Type
<	less than	relational
>	greater than	relational
<=	less than or equal to	relational
>=	greater than or equal to	relational
==	equal to	equality
!=	not equal to	equality

Relational and Equality Operators example

x	power	MAX_POW	y	item	MIN_ITEM	mom_or_dad	num	SENTINEL
-5	1024	1024	7	1.5	-999.0	'M'	999	999

TABLE 4.2 Sample Conditions

Operator	Condition	English Meaning	Value
<=	x <= 0	x less than or equal to 0	1 (true)
<	power < MAX_POW	power less than MAX_POW	0 (false)
>=	x >= y	x greater than or equal to y	0 (false)
>	item > MIN_ITEM	item greater than MIN_ITEM	1 (true)
==	mom_or_dad == 'M'	mom_or_dad equal to 'M'	1 (true)
!=	num != SENTINEL	num not equal to SENTINEL	0 (false)

Logical Operators


- There are three logical operators
 - **&&** (**and**)
 - **||** (**or**)
 - **!** (**not**)
- We can form more complicated conditions or logical expressions.
- **logical expression** an expression that uses one or more of the logical operators && (and), || (or), ! (not).

Logical Operators

X	Y	X&&Y	X Y	!X
T	T	T	T	F
T	F	F	T	F
F	T	F	T	T
F	F	F	F	T

Operator Precedence

TABLE 4.6 Operator Precedence

Operator	Precedence
function calls	highest
! + - & (unary operators)	
* / %	
+ -	
< <= >= >	
== !=	
&&	
=	
	lowest

Operator Precedence example

x	y	z	flag
3.0	4.0	2.0	0


1. !flag	/* !0 is 1 (true)	*/
2. x + y / z <= 3.5	/* 5.0 <= 3.5 is 0 (false)	*/
3. !flag (y + z >= x - z)	/* 1 1 is 1 (true)	*/
4. !(flag (y + z >= x - z))	/* !(0 1) is 0 (false)	*/

Figure 4.1 shows the evaluation tree and step-by-step evaluation for expression 3.

Operator Precedence example

Evaluation Tree and Step-by-Step Evaluation for

- `!flag || (y + z >= x - z)`

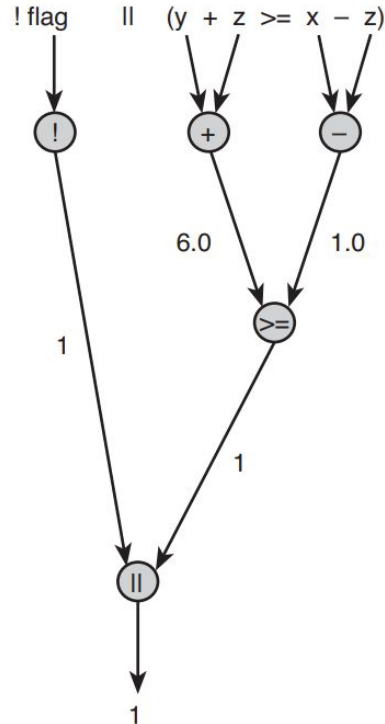

flag	y	z	x
0	4.0	2.0	3.0
<code>!flag (y + z >= x - z)</code>			
<u>0</u>	<u>4.0</u>	<u>2.0</u>	<u>3.0</u>
1	<u>6.0</u>	<u>1.0</u>	
		<u>1</u>	
			1

Comparing Characters

Expression	Value
'9' >= '0'	1(true)
'a' < 'e'	1(true)
'B' <= 'A'	0(false)
'Z' == 'z'	0(false)
'a' <= 'A'	system dependent (false for ASCII)
'a' <= ch && ch <= 'z'	1(true) if ch is a lowercase letter

Logical Assignment

```
#include<stdio.h>
int main() {
    int grade, hasPassed;

    printf("Please enter a grade");
    scanf("%d", &grade);

    hasPassed = ( grade >= 60 );
    printf("The student passed the course %d", hasPassed);
    return 0;
}
```



Chapter 4

- Selection Structures
 - If Statement

If statement

- If statement with **one alternative**

```
if(expression) // if(x==10)
```

```
Statement;
```

- If statement with **two alternatives**

```
if(expression) // if(age>56)
```

```
Statement;
```

```
else
```

```
Statement;
```

If statement

- If with single-statement

```
if (x != 0.0)
```

```
product = product * x; // This statement execute if true only
```

```
printf("%f",product ); // every time execute not related to if
```

- If with compound-statement

```
if(x!=0.0)
```

```
{  
    product = product * x;  
    printf("%f",product );  
}
```

All statements between
braces execute.

```
if ( condition )  
{  
    true task  
}  
else  
{  
    false task  
}
```

If statement

A hand trace, or desk check

TABLE 4.9 Trace of if Statement

Statement Part	x	y	temp	Effect
	12.5	5.0	?	
if (x > y) {				12.5 > 5.0 is true.
temp = x;			12.5	Store old x in temp.
x = y;	5.0			Store old y in x.
y = temp;		12.5		Store old x in y.

If statement

Flags : is a variable whose contents an integer variable with **zero** for "false" and **non-zero** for "true"

```
if (attended == 1)
    attendance++;

if (attended)
    attendance++;
```

```
if (attended == 0)
{
    absentees++;
    printf("One more absentee.\n");
}

if (!attended) {
    absentees++;
    printf("One more absentee.\n");
}
```

If statement

Nested if Statements and Sequence of ifs

```
if (x > 0)
    num_pos = num_pos + 1;
else
    if (x < 0)
        num_neg = num_neg + 1;
    else /* x equals 0 */
        num_zero = num_zero + 1;
```

```
if (x > 0)
    num_pos = num_pos + 1;
if (x < 0)
    num_neg = num_neg + 1;
if (x == 0)
    num_zero = num_zero + 1;
```

Multiple-Alternative Decisions

If statement

Nested if Statements with More Than One Variable

```
/* Print a message if all criteria are met. */  
if (marital_status == 'S')  
    if (gender == 'M')  
        if (age >= 18 && age <= 26)  
            printf("All criteria are met.\n");
```

An equivalent statement that uses a single `if` with a compound condition follows.

```
if (marital_status == 'S' && gender == 'M' && age >= 18 && age <= 26)  
    printf("All criteria are met.\n");
```

If statement

What is the output of the following program?

```
#include <stdio.h>
int main()
{
    int x=0;
    if (x==1) false
    {
        printf ("hello");
        printf ("welcome");
    }
    else
    printf ("hi");
}
```

// hi

```
#include <stdio.h>
int main()
{
    int x=0;
    if (x==0) true
    {
        printf ("hello");
        printf ("welcome");
    }
    else
    printf ("hi");
}
```

// hello

If statement

What is the output of the following program?

```
#include <stdio.h>
int main()
{
    int y=0;
    if (y) false
        printf ("hello");
    printf ("welcome");
    return 0;
} // welcome
```

```
#include <stdio.h>
int main()
{
    int y=8; true
    if (y)
        printf ("hello");
    printf ("welcome");
    return 0;
} // hello
  welcome
```


If statement

What is the output of the following program?

```
#include <stdio.h>
int main()
{
    int y=8, x=0;
    if (y || x) true
        printf ("hello");
    printf ("welcome");
    return 0;
}
```

*// hello
welcome*

```
#include <stdio.h>
int main()
{
    int x=0;
    if (x==0) True
    {
        printf ("hello");
        printf ("welcome");
    }
    else
    {
        printf ("hi");
        printf ("hi3");
    }
}
```

*// hello
welcome*

If statement

What is the output of the following program?

```
#include <stdio.h>
int main()
{
    int x=5;
    if (x<0)
        printf ("hello");
    printf ("welcome");
}
```

False

//welcome

```
#include <stdio.h>
int main()
{
    int x=5;
    if (x>0)
        printf ("hello");
    printf ("welcome");
}
```

hello
welcome

If statement Example

Write a C program which takes a character as input from the user. Check whether the character is an alphabet or not.

```
#include<stdio.h>
int main()
{
    char ch;
    printf("Enter the character to be checked: ");
    scanf("%c",&ch);
    //checking if it is a Alphabet
    if( (ch>='A'&&ch<='Z') || (ch>='a'&&ch<='z') )
    {
        printf("The input character is an alphabet\n");
    }
    else
    {
        printf("The input character is NOT an alphabet\n");
    }
}
```

Conditional Operator (?:)

- **Syntax** : condition ? expr1 : expr2

```
if (marks < 50)
printf("Failed\n");
else
printf("Passed\n");
```

// equivalent

```
printf("%s\n", grade < 50 ? "Failed" : "Passed");
```

```
max = (a > b ? a : b);
// equivalent to:
```

```
if (a > b)
    max = a;
else
    max = b;
```



Chapter 4

- Selection Structures
 - Switch Statement

If-else is more efficient than If ?

```
if (day == 0 )
    printf ("Sunday") ;
if (day == 1 )
    printf ("Monday") ;
if (day == 2)
    printf ("Tuesday") ;
if (day == 3)
    printf ("Wednesday") ;
if (day == 4)
    printf ("Thursday") ;
if (day == 5)
    printf ("Friday") ;
if (day == 6)
    printf ("Saturday") ;
if ((day < 0) || (day > 6))
    printf("Error - invalid day.\n");
```

```
if (day == 0 ) {
    printf ("Sunday") ;
} else if (day == 1 ) {
    printf ("Monday") ;
} else if (day == 2) {
    printf ("Tuesday") ;
} else if (day == 3) {
    printf ("Wednesday") ;
} else if (day == 4) {
    printf ("Thursday") ;
} else if (day == 5) {
    printf ("Friday") ;
} else if (day = 6) {
    printf ("Saturday") ;
} else {
    printf ("Error - invalid day.\n") ;
}
```

Switch Statement

- The switch is a multi-selection statement that could be used instead of **'if-else'** statement.
- The switch statement selection is based on the value of a **single variable** or of a **simple expression**.
- The value of the expression should be of type **int** or **char** ONLY.

```
switch (expression) {  
  case v1: s1 ;  
  break;  
  case v2: s2 ;  
  break;  
  . . .  
  default: sn ;  
  break; /* optional break */  
}
```

Switch Statement

- A **break** should almost be after each **case** in the switch.
- The break causes program to jump to the next line after the end brace of switch.
- **Without the break**, the code flows into the next case. This conflicts with the goal of switch structure.
- **default** is optional , but always consider using it.
- Switch statement may be easier to read.
- Switch is easier to add new cases to a switch statement than to a nested if-else structure.

Switch Statement

What is the output when
day=3 ?

Output :

Wednesday

```
switch ( day )  
{  
case 0: printf ("Sunday\n") ;  
    break ;  
case 1: printf ("Monday\n") ;  
    break ;  
case 2: printf ("Tuesday\n") ;  
    break ;  
case 3: printf ("Wednesday\n") ;  
    break ;  
case 4: printf ("Thursday\n") ;  
    break ;  
case 5: printf ("Friday\n") ;  
    break ;  
case 6: printf ("Saturday\n") ;  
    break ;  
default: printf ("Error -- invalid day.\n") ;  
    break ;  
}
```

Switch Statement

What is the output
when **day=3** ?

Output :

Wednesday

Thursday

Friday

```
13     int day=3;
14     switch ( day )
15     {
16     case 0: printf ("Sunday\n") ;
17         break ;
18     case 1: printf ("Monday\n") ;
19         break ;
20     case 2: printf ("Tuesday\n") ;
21         break ;
22     case 3: printf ("Wednesday\n") ;
23     case 4: printf ("Thursday\n") ;
24     case 5: printf ("Friday\n") ;
25         break ;
26     case 6: printf ("Saturday\n") ;
27         break ;
28     default: printf ("Error -- invalid day.\n") ;
29         break ;
30 }
```

Switch Example

Displays one of five messages based on the value of next_ch (type char). If next_ch is **'D', 'd', or 'F', 'f'**, the student is put on probation. If next_ch is not listed in the case labels, displays an error message.

switch Statement

```
switch (next_ch) {
case 'A':
case 'a':
    printf("Excellent");
    break;

case 'B':
case 'b':
    printf("Good");
    break;

case 'C':
case 'c':
    printf("O.K.");
    break;

case 'D':
case 'd':
case 'F':
case 'f':
    printf("Poor, student is ");
    printf("on probation");
    break;

default:
    printf("Invalid letter grade");
}
```

Common Programming Errors

```
if (0 <= x <= 4)
    printf("Condition is not true\n");

if(0 <= x && x <= 4)
    printf("Condition is true\n");
```

```
if (x = 10)
    printf("x is 10");
```

Always prints x is 10 , regardless of the value of x .

```
if (x > 0)
    sum = sum + x;
printf("Greater than zero\n");
else
    printf("Less than or equal to zero\n");
```




Thank You.

